

## ABSOLUTE STABILITY RESULTS FOR WELL-POSED INFINITE-DIMENSIONAL SYSTEMS WITH APPLICATIONS TO LOW-GAIN INTEGRAL CONTROL \*

HARTMUT LOGEMANN<sup>1</sup> AND RUTH F. CURTAIN<sup>2</sup>

**Abstract.** We derive absolute stability results for well-posed infinite-dimensional systems which, in a sense, extend the well-known circle criterion to the case that the underlying linear system is the series interconnection of an exponentially stable well-posed infinite-dimensional system and an integrator and the nonlinearity  $\phi$  satisfies a sector condition of the form  $\langle \phi(u), \phi(u) - au \rangle \leq 0$  for some constant  $a > 0$ . These results are used to prove convergence and stability properties of low-gain integral feedback control applied to exponentially stable, linear, well-posed systems subject to actuator nonlinearities. The class of actuator nonlinearities under consideration contains standard nonlinearities which are important in control engineering such as saturation and deadzone.

**AMS Subject Classification.** 93C10, 93C20, 93C25, 93D05, 93D09, 93D10, 93D21.

Received October 18, 1999. Revised March 24, 2000.

### 1. INTRODUCTION

Absolute stability problems and their relations to positive-real conditions have played a prominent role in finite-dimensional systems and control theory and have led to a number of important stability criteria for closed-loop systems obtained by applying unity feedback controls to linear dynamical systems subject to static input or output nonlinearities, see, for example, Aizerman and Gantmacher [1], Khalil [13], Lefschetz [14], Leonov *et al.* [15] and Vidyasagar [28]. Although there is some literature on absolute stability problems in infinite dimensions (for example, Bucci [4], Corduneanu [7], Leonov *et al.* [15], Logemann [17], Wexler [33, 34]), the number of results available in the literature is fairly limited, in particular for systems with unbounded control and observation.

In this paper we study a certain absolute stability problem for the class of well-posed infinite-dimensional systems which are documented in Salamon [24, 25], Staffans [26, 27] and Weiss [29–32]. We remark that the class of well-posed, linear, infinite-dimensional systems is rather general: it includes most distributed parameter

---

*Keywords and phrases:* Absolute stability, actuator nonlinearities, circle criterion, integral control, positive real, robust tracking, well-posed infinite-dimensional systems.

\* *This work was supported by the UK-DUTCH Joint Scientific Research Programme and by the UK EPSRC Council (Grant GR/L78086).*

<sup>1</sup> Department of Mathematical Sciences, University of Bath, Claverton Down, Bath BA2 7AY, U.K.; e-mail: [hl@maths.bath.ac.uk](mailto:hl@maths.bath.ac.uk)

<sup>2</sup> Mathematics Institute, University of Groningen, P.O. Box 800, 9700 AV Groningen, The Netherlands;  
e-mail: [R.F.Curtain@math.rug.nl](mailto:R.F.Curtain@math.rug.nl)

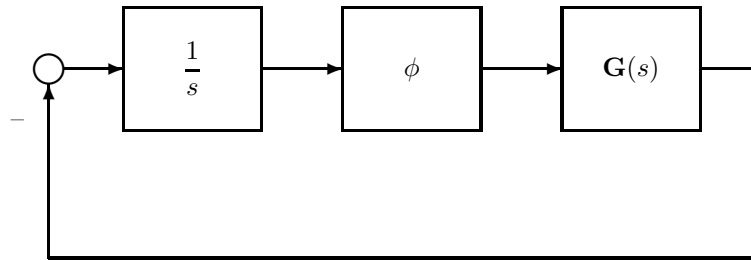


Figure 1

systems and all time-delay systems (retarded and neutral) which are of interest in applications. Consider the system shown in Figure 1, where  $\mathbf{G}$  is the transfer function of an exponentially stable, well-posed, infinite-dimensional, linear system and  $\phi : U \rightarrow U$  is a locally Lipschitz nonlinearity which, for some  $a \geq 0$ , satisfies the sector condition

$$\langle \phi(u), \phi(u) - au \rangle \leq 0, \quad \forall u \in U, \tag{1.1}$$

where  $U$  denotes the input space of the well-posed system which is assumed to be a real Hilbert space. Given  $b > 0$ , we study the absolute stability problem of finding conditions on  $\mathbf{G}$  such that the feedback system in Figure 1 is stable for all locally Lipschitz  $\phi$  satisfying (1.1) for some  $a \in [0, b)$ . In Section 3 we show that if  $\mathbf{G}(0)$  is invertible and the positive real condition

$$I + \frac{b}{2} \left( \frac{1}{s} \mathbf{G}(s) + \frac{1}{\bar{s}} \mathbf{G}^*(s) \right) \geq 0, \quad s \in \mathbb{C} \text{ with } \text{Re } s > 0 \tag{1.2}$$

holds, then, for all locally Lipschitz  $\phi$  satisfying (1.1) for some  $a \in [0, b)$ , the equilibrium of the closed-loop system shown in Figure 1 is stable in the large. Moreover, under suitable extra assumptions on  $\phi$ , we prove that the equilibrium is semi-globally exponentially stable. These results extend, in a certain sense, a part of the well-known circle criterion, see Remark 3.2, Part (e).

In Section 4 we apply the absolute stability results obtained in Section 3 to the low-gain integral control problem illustrated in Figure 2, where  $r \in U$  is the reference vector and  $k > 0$  is the integral gain.

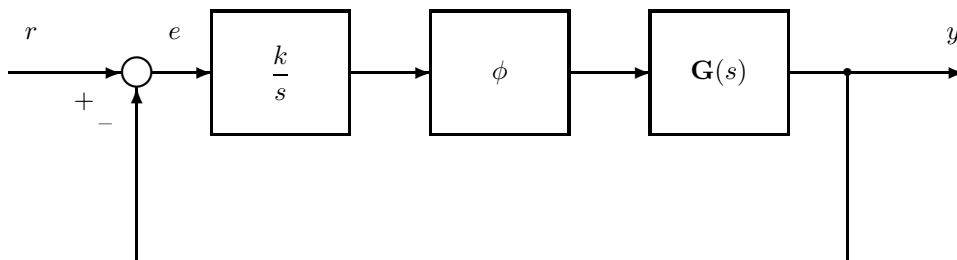


Figure 2

We assume that  $U = \mathbb{R}^m$ ,  $\mathbf{G}$  is the transfer function of an exponentially stable well-posed system such that  $\mathbf{G}(0)$  is invertible and  $\phi : \mathbb{R}^m \rightarrow \mathbb{R}^m$  is a decoupled nonlinearity of the form

$$\phi(u) = [\phi_1(u_1), \phi_2(u_2), \dots, \phi_m(u_m)]^T, \quad \forall u = (u_1, u_2, \dots, u_m)^T \in \mathbb{R}^m,$$

where the functions  $\phi_i : \mathbb{R} \rightarrow \mathbb{R}$  are non-decreasing and globally Lipschitz with Lipschitz constants  $\lambda_i > 0$ . Setting

$$K := \sup\{b > 0 : (1.2) \text{ holds}\}, \quad \lambda := \max \lambda_i,$$

we prove that for all  $k \in (0, K/\lambda)$  and for all reference vectors  $r$  satisfying  $[\mathbf{G}(0)]^{-1}r \in \text{im } \phi$ , the error  $e(\cdot) = r - y(\cdot)$  is in  $L^2(\mathbb{R}_+, \mathbb{R}^m)$ . Moreover, we show that if the impulse response of the linear system (*i.e.* the inverse Laplace transform of the transfer function  $\mathbf{G}$ ) is a (matrix-valued) Borel measure and if the initial condition of the plant is “sufficiently smooth”, then  $e(t) \rightarrow 0$  as  $t \rightarrow \infty$ , *i.e.*, the output  $y(t)$  asymptotically tracks the reference vector  $r$ . Under mild extra assumptions on  $r$  and  $\phi$ , the convergence will be exponentially fast. We remark that these results considerably improve earlier work by Logemann *et al.* [20] in the sense that (i) our results guarantee better asymptotic and faster convergence properties and (ii) our results are not restricted to single-input single-output regular systems, but apply to the wider class of multivariable well-posed systems.

The paper is organized as follows. Section 2 contains some preliminaries on well-posed infinite-dimensional systems. Section 3 is devoted to a detailed analysis of the absolute stability problem described above. In Section 4 we apply the absolute stability theory developed in Section 3 to derive results on the low-gain integral control problem illustrated in Figure 2. An example of a diffusion process with output delay illustrating our results is given in Section 5. Finally, some technicalities are relegated to the Appendix.

**Notation.** Let  $X$  be a real or complex Hilbert space; for  $\tau \geq 0$ ,  $\mathbf{R}_\tau$  denotes the operator of the right-shift by  $\tau$  on  $L^p_{\text{loc}}(\mathbb{R}_+, X)$ , where  $\mathbb{R}_+ := [0, \infty)$ ; the truncation operator  $\mathbf{P}_\tau : L^p_{\text{loc}}(\mathbb{R}_+, X) \rightarrow L^p(\mathbb{R}_+, X)$  is given by  $(\mathbf{P}_\tau u)(t) = u(t)$  if  $t \in [0, \tau]$  and  $(\mathbf{P}_\tau u)(t) = 0$  otherwise; for  $\alpha \in \mathbb{R}$ , we define the exponentially weighted  $L^p$ -space  $L^p_\alpha(\mathbb{R}_+, X) := \{f \in L^p_{\text{loc}}(\mathbb{R}_+, X) \mid f(\cdot) \exp(-\alpha \cdot) \in L^p(\mathbb{R}_+, X)\}$  and endow it with the norm  $\|f\|_{p,\alpha} := \|f(\cdot) \exp(-\alpha \cdot)\|_{L^p}$ , where  $\|\cdot\|_{L^p}$  denotes the usual norm in  $L^p(\mathbb{R}_+, X)$ ; for  $\tau > 0$ ,  $W^{1,2}([0, \tau], X)$  denotes the space of all functions  $f : [0, \tau] \rightarrow X$  for which there exists  $g \in L^2([0, \tau], X)$  such that  $f(t) = f(0) + \int_0^t g(s) ds$  for all  $t \in [0, \tau]$ ;  $W^{1,2}_{\text{loc}}(\mathbb{R}_+, X)$  denotes the space of all functions  $f : \mathbb{R}_+ \rightarrow X$  such that for all  $\tau > 0$ , the restriction of  $f$  to  $[0, \tau]$  belongs to  $W^{1,2}([0, \tau], X)$ ;  $\mathcal{M}$  denotes the space of all  $\mathbb{R}^{m \times m}$ -valued Borel measures on  $\mathbb{R}_+$ ; for  $\alpha \in \mathbb{R}$ , we define  $\mathcal{M}_\alpha$  to be the space of all  $\mathbb{R}^{m \times m}$ -valued Borel measures on  $\mathbb{R}_+$  with the property that the exponentially weighted measure  $E \mapsto \int_E e^{-\alpha t} \mu(dt)$  belongs to  $\mathcal{M}$ ; for  $\alpha \in \mathbb{R}$ ,  $\mathbb{C}_\alpha := \{s \in \mathbb{C} \mid \text{Re } s > \alpha\}$ ;  $H^2(\mathbb{C}_\alpha, X)$  denotes the Hardy-Lebesgue space of square-integrable functions defined on  $\mathbb{C}_\alpha$  with values in  $X$ ; for a Banach space  $Z$ ,  $H^\infty(\mathbb{C}_\alpha, Z)$  denotes the space of bounded holomorphic functions defined on  $\mathbb{C}_\alpha$  with values in  $Z$ ;  $\mathcal{B}(X_1, X_2)$  denotes the space of bounded linear operators from a Hilbert space  $X_1$  to a Hilbert space  $X_2$ ; we write  $\mathcal{B}(X)$  for  $\mathcal{B}(X, X)$ ; the Laplace transform is denoted by  $\mathfrak{L}$ .

If  $X$  is a real Hilbert space, then its complexification is denoted by  $X_c$ . Every vector  $z \in X_c$  can be uniquely expressed in the form  $z = x + iy$ , where  $x, y \in X$ . In particular,  $X \subset X_c$ . The inner product  $\langle \cdot, \cdot \rangle$  on  $X$  extends in a natural way to a (complex) inner product on  $X_c$ ; a similar statement is true for a linear operator  $S$  on  $X$  (see Halmos [12], p. 150, for details). We shall use the same symbol  $\langle \cdot, \cdot \rangle$  (respectively,  $S$ ) for the original inner product (respectively, operator) and the associated extensions. A linear operator  $S : \text{dom}(S) \subset X_c \rightarrow Y_c$ , where  $Y$  is a real Hilbert space, is called *real*, if  $Sx \in Y$  for all  $x \in \text{dom}(S) \cap X$ .

## 2. PRELIMINARIES ON WELL-POSED SYSTEMS

We assemble some fundamental facts pertaining to well-posed linear systems and regular linear systems and tailored to later requirements: the reader is referred to Salamon [24, 25], Staffans [26, 27] and Weiss [29–32] for full details.

**Well-posed systems.** The concept of a well-posed linear system which will be used in this paper was introduced in [32]; an equivalent definition can be found in [24]. Let  $U, X$  and  $Y$  be real Hilbert spaces and let  $\Sigma = (\mathbf{T}, \Phi, \Psi, \mathbf{F})$  be a *well-posed* linear system with *state space*  $X$ , *input space*  $U$  and *output space*  $Y$ , *i.e.*

$$\mathbf{T} = (\mathbf{T}_t)_{t \geq 0} \text{ is a } C_0\text{-semigroup of bounded linear operators on } X;$$

$\Phi = (\Phi_t)_{t \geq 0}$  is a family of bounded linear operators from  $L^2(\mathbb{R}_+, U)$  to  $X$  such that, for all  $\tau, t \geq 0$ ,

$$\Phi_{\tau+t}(\mathbf{P}_\tau u + \mathbf{R}_\tau v) = \mathbf{T}_t \Phi_\tau u + \Phi_t v, \quad \forall u, v \in L^2(\mathbb{R}_+, U);$$

$\Psi = (\Psi_t)_{t \geq 0}$  is a family of bounded linear operators from  $X$  to  $L^2(\mathbb{R}_+, Y)$  such that  $\Psi_0 = 0$  and, for all  $\tau, t \geq 0$ ,

$$\Psi_{\tau+t} x^0 = \mathbf{P}_\tau \Psi_\tau x^0 + \mathbf{R}_\tau \Psi_t \mathbf{T}_\tau x^0, \quad \forall x^0 \in X;$$

$\mathbf{F} = (\mathbf{F}_t)_{t \geq 0}$  is a family of bounded linear operators from  $L^2(\mathbb{R}_+, U)$  to  $L^2(\mathbb{R}_+, Y)$  such that  $\mathbf{F}_0 = 0$  and, for all  $\tau, t \geq 0$ ,

$$\mathbf{F}_{\tau+t}(\mathbf{P}_\tau u + \mathbf{R}_\tau v) = \mathbf{P}_\tau \mathbf{F}_\tau u + \mathbf{R}_\tau (\Psi_t \Phi_\tau u + \mathbf{F}_t v), \quad \forall u, v \in L^2(\mathbb{R}_+, U).$$

For an input  $u \in L^2_{\text{loc}}(\mathbb{R}_+, U)$  and initial state  $x^0 \in X$ , the associated state function  $x \in C(\mathbb{R}_+, X)$  and output function  $y \in L^2_{\text{loc}}(\mathbb{R}_+, Y)$  of  $\Sigma$  are given by

$$x(t) = \mathbf{T}_t x^0 + \Phi_t \mathbf{P}_t u, \tag{2.1a}$$

$$\mathbf{P}_t y = \Psi_t x^0 + \mathbf{F}_t \mathbf{P}_t u. \tag{2.1b}$$

$\Sigma$  is said to be *exponentially stable* if the semigroup  $\mathbf{T}$  is exponentially stable:

$$\omega(\mathbf{T}) := \lim_{t \rightarrow \infty} \frac{1}{t} \ln \|\mathbf{T}_t\| < 0.$$

$\Psi_\infty$  and  $\mathbf{F}_\infty$  will denote the unique operators  $X \rightarrow L^2_{\text{loc}}(\mathbb{R}_+, Y)$  and  $L^2_{\text{loc}}(\mathbb{R}_+, U) \rightarrow L^2_{\text{loc}}(\mathbb{R}_+, Y)$ , respectively, satisfying

$$\Psi_\tau = \mathbf{P}_\tau \Psi_\infty, \quad \mathbf{F}_\tau = \mathbf{P}_\tau \mathbf{F}_\infty; \quad \forall \tau \geq 0.$$

For any  $\alpha > \omega(\mathbf{T})$ ,  $\Psi_\infty$  is a bounded operator from  $X$  into  $L^2_\alpha(\mathbb{R}_+, Y)$  and  $\mathbf{F}_\infty$  maps  $L^2_\alpha(\mathbb{R}_+, U)$  boundedly into  $L^2_\alpha(\mathbb{R}_+, Y)$ . If  $\Sigma$  is exponentially stable, then the operators  $\Phi_t$ ,  $\Psi_t$  and  $\mathbf{F}_t$  are uniformly bounded. Since  $\mathbf{P}_\tau \mathbf{F}_\infty = \mathbf{P}_\tau \mathbf{F}_\infty \mathbf{P}_\tau$  for all  $\tau \geq 0$ ,  $\mathbf{F}_\infty$  is a *causal operator*, called the *input-output operator* of  $\Sigma$ .

**Transfer functions.** Weiss [29] has established that if  $\alpha > \omega(\mathbf{T})$ , then there exists a unique holomorphic function  $\mathbf{G} : \mathbb{C}_{\omega(\mathbf{T})} \rightarrow \mathcal{B}(U_c, Y_c)$  such that

$$\mathbf{G}(s)(\mathcal{L}u)(s) = [\mathcal{L}(\mathbf{F}_\infty u)](s), \quad \forall s \in \mathbb{C}_\alpha, \quad \forall u \in L^2_\alpha(\mathbb{R}_+, U),$$

where  $\mathcal{L}$  denotes Laplace transform. In particular,  $\mathbf{G}$  is bounded on  $\mathbb{C}_\alpha$  for all  $\alpha > \omega(\mathbf{T})$ . Moreover, for all  $s \in (\omega(\mathbf{T}), \infty)$ ,  $\mathbf{G}(s)$  is a real operator. The function  $\mathbf{G}$  is called the *transfer function* of  $\Sigma$ .

$\Sigma$  and its transfer function  $\mathbf{G}$  are said to be *regular* if there exists a linear operator  $D$  such that

$$\lim_{s \rightarrow \infty, s \in \mathbb{R}} \mathbf{G}(s)u = Du, \quad \forall u \in U,$$

in which case, by the principle of uniform boundedness, it follows that  $D \in \mathcal{B}(U, Y)$  (in particular,  $D$  is real). The operator  $D$  is called the *feedthrough operator* of  $\Sigma$ .

**Control and observation operators.** The generator of  $\mathbf{T}$  is denoted by  $A$  with domain  $\text{dom}(A)$ . Let  $X_1$  be the space  $\text{dom}(A)$  endowed with the graph norm. The norm on  $X$  is denoted by  $\|\cdot\|$ , whilst  $\|\cdot\|_1$  denotes the graph norm. Let  $X_{-1}$  be the completion of  $X$  with respect to the norm  $\|x\|_{-1} = \|(\lambda I - A)^{-1}x\|$ , where  $\lambda \in \rho(A)$  is any fixed element of the resolvent set  $\rho(A)$  of  $A$ . Then  $X_1 \subset X \subset X_{-1}$  and the canonical injections are bounded and dense. The semigroup  $\mathbf{T}$  can be restricted to a  $C_0$ -semigroup on  $X_1$  and extended to a  $C_0$ -semigroup on  $X_{-1}$ . The exponential growth constant is the same on all three spaces. The generator on  $X_{-1}$  is an extension of  $A$  to  $X$  (which is bounded as an operator from  $X$  to  $X_{-1}$ ). We shall use the same

symbol  $\mathbf{T}$  (respectively,  $A$ ) for the original semigroup (respectively, its generator) and the associated restrictions and extensions. With this convention, we may write  $A \in \mathcal{B}(X, X_{-1})$ . Considered as a generator on  $X_{-1}$ , the domain of  $A$  is  $X$ .

By a representation theorem due to Salamon [24] (see also Weiss [30, 31]), there exist unique operators  $B \in \mathcal{B}(U, X_{-1})$  and  $C \in \mathcal{B}(X_1, Y)$  (the *control operator* and the *observation operator* of  $\Sigma$ , respectively) such that, for all  $t \geq 0$ ,  $u \in L^2_{\text{loc}}(\mathbb{R}_+, U)$  and  $x^0 \in X_1$ ,

$$\Phi_t \mathbf{P}_t u = \int_0^t \mathbf{T}_{t-\tau} B u(\tau) d\tau \quad \text{and} \quad (\Psi_\infty x^0)(t) = C \mathbf{T}_t x^0.$$

The so-called *Lebesgue extension* of  $C$ , denoted by  $C_L$ , is defined by

$$C_L x^0 = \lim_{t \rightarrow 0} C \frac{1}{t} \int_0^t \mathbf{T}_\tau x^0 d\tau,$$

where  $\text{dom}(C_L)$  is the set of all those  $x^0 \in X$  for which the above limit exists (see [31]). Clearly  $X_1 \subset \text{dom}(C_L) \subset X$ . Furthermore, for any  $x^0 \in X$ , we have that  $\mathbf{T}_t x^0 \in \text{dom}(C_L)$  for almost every  $t \geq 0$  and

$$(\Psi_\infty x^0)(t) = C_L \mathbf{T}_t x^0, \quad \text{a.e. } t \geq 0. \tag{2.2}$$

$B$  is said to be *bounded* if it is so as a map from the input space  $U$  to the state space  $X$ , otherwise,  $B$  is said to be *unbounded*.  $C$  is said to be *bounded* if it can be extended continuously to  $X$ , otherwise,  $C$  is said to be *unbounded*. If  $\mathbf{T}$  is exponentially stable, then there exist constants  $\beta_1, \beta_2 > 0$  such that, for all  $t \geq 0$ ,  $u \in L^2(\mathbb{R}_+, U)$  and  $x^0 \in X$ ,

$$\|\Phi_t \mathbf{P}_t u\| = \left\| \int_0^t \mathbf{T}_{t-\tau} B u(\tau) d\tau \right\| \leq \beta_1 \|u\|_{L^2(0,t;U)}, \tag{2.3}$$

$$\|\Psi_\infty x^0\|_{L^2(0,t;Y)} = \left( \int_0^t \|C \mathbf{T}_\tau x^0\|^2 d\tau \right)^{1/2} \leq \beta_2 \|x^0\|. \tag{2.4}$$

For any  $x^0 \in X$  and  $u \in L^2_{\text{loc}}(\mathbb{R}_+, U)$ , the state trajectory  $x(\cdot)$  defined by (2.1a) satisfies the equation

$$\dot{x}(t) = Ax(t) + Bu(t), \quad x(0) = x^0, \quad \text{a.e. } t \geq 0. \tag{2.5}$$

The derivative on the left-hand side of (2.5) has, of course, to be understood in  $X_{-1}$ . In other words, if we consider the initial-value problem (2.5) in the space  $X_{-1}$ , then for any  $x^0 \in X$  and  $u \in L^2_{\text{loc}}(\mathbb{R}_+, U)$ , (2.5) has a unique strong solution (in the sense of Pazy [22], p. 109) given by the variation of parameters formula

$$t \mapsto x(t) = \mathbf{T}_t x^0 + \int_0^t \mathbf{T}_{t-\tau} B u(\tau) d\tau. \tag{2.6}$$

It has been shown in [24] that for any  $x^0 \in X_1$ ,  $u \in W^{1,2}_{\text{loc}}(\mathbb{R}_+, U)$  with  $u(0) = 0$  and  $s_0 \in \rho(A)$ , the output function  $y(\cdot)$  defined by (2.1b) can be expressed as

$$y(t) = C \left[ \mathbf{T}_t x^0 + \int_0^t \mathbf{T}_{t-\tau} B u(\tau) d\tau - (s_0 I - A)^{-1} B u(t) \right] + \mathbf{G}(s_0) u(t), \quad \text{a.e. } t \geq 0. \tag{2.7}$$

If  $\Sigma$  is regular (with feedthrough  $D$ ), then the state trajectory  $x(\cdot)$  defined by (2.1a) satisfies  $x(t) \in \text{dom}(C_L)$  for almost every  $t \geq 0$  and the output  $y(t)$  given by (2.1b) can be written in the familiar form

$$y(t) = C_L x(t) + Du(t), \quad \text{a.e. } t \geq 0. \tag{2.8}$$

We know from [10] and [24] that for all  $s, s_0 \in \varrho(A)$ ,  $s \neq s_0$

$$\frac{1}{s - s_0} (\mathbf{G}(s) - \mathbf{G}(s_0)) = -C(sI - A)^{-1}(s_0I - A)^{-1}B. \tag{2.9}$$

Moreover, it has been demonstrated in [29] that, if  $\Sigma$  is regular (with feedthrough  $D$ ), then  $(sI - A)^{-1}BU \subset \text{dom}(C_L)$  for all  $s \in \varrho(A)$  and the transfer function  $\mathbf{G}$  can be expressed as

$$\mathbf{G}(s) = C_L(sI - A)^{-1}B + D, \quad \forall s \in \mathbb{C}_{\omega(\mathbf{T})}, \tag{2.10}$$

which is familiar from finite-dimensional systems theory. The operators  $A, B, C$  (and  $D$ , in the regular case) are called the *generating operators* of  $\Sigma$ . Note that in the non-regular case, the generating operators do not completely determine the system  $\Sigma$ , since  $A, B$  and  $C$  determine the input-output operator  $\mathbf{F}_\infty$  only up to an additive constant (see (2.9)).

**Four technical lemmas.** In the following let  $\Sigma = (\mathbf{T}, \Phi, \Psi, \mathbf{F})$  be a well-posed linear system with state space  $X$ , input space  $U$ , output space  $Y$ , generating operators  $A, B$  and  $C$ , input-output operator  $\mathbf{F}_\infty$  and transfer function  $\mathbf{G}$ . We state four lemmas on the asymptotic behaviour and the regularity of the solutions to (2.1) and on the existence and uniqueness of solutions for a certain nonlinear feedback system with (2.1) in the forward loop.

**Lemma 2.1.** *Let  $x^0 \in X$ . If  $u \in L^2_{\text{loc}}(\mathbb{R}_+, U)$  and  $u^\infty \in U$  are such that  $u - u^\infty \in L^2_\alpha(\mathbb{R}_+, U)$  for some  $\alpha > \omega(\mathbf{T})$ , then the output  $y$  of  $\Sigma$  (given by (2.1b)) satisfies*

$$y - \mathbf{G}(0)u^\infty \in L^2_\alpha(\mathbb{R}_+, Y).$$

*Proof:* Since  $\alpha > \omega(\mathbf{T})$ , the function  $t \mapsto C_L \mathbf{T}_t x^0$  is in  $L^2_\alpha(\mathbb{R}_+, Y)$ . Combining this with the identity

$$y(t) = C_L \mathbf{T}_t x^0 + (\mathbf{F}_\infty u)(t), \quad \text{a.e. } t \geq 0,$$

it follows that it is sufficient to show that

$$\mathbf{F}_\infty u - y^\infty \in L^2_\alpha(\mathbb{R}_+, Y),$$

where  $y^\infty := \mathbf{G}(0)u^\infty$ . Trivially, we have

$$\mathbf{F}_\infty u - y^\infty = \mathbf{F}_\infty(u - u^\infty) + \mathbf{F}_\infty(u^\infty) - y^\infty. \tag{2.11}$$

Since  $u - u^\infty \in L^2_\alpha(\mathbb{R}_+, U)$  for some  $\alpha > \omega(\mathbf{T})$ , we may conclude that  $\mathbf{F}_\infty(u - u^\infty) \in L^2_\alpha(\mathbb{R}_+, Y)$ . Therefore, by (2.11), the claim follows if we can show that

$$\mathbf{F}_\infty(u^\infty) - y^\infty \in L^2_\alpha(\mathbb{R}_+, Y). \tag{2.12}$$

To this end take the Laplace transform of  $\mathbf{F}_\infty(u^\infty) - y^\infty$  to obtain

$$(\mathfrak{L}(\mathbf{F}_\infty(u^\infty) - y^\infty))(s) = \frac{1}{s} \mathbf{G}(s)u^\infty - \frac{1}{s} y^\infty = \frac{1}{s} (\mathbf{G}(s) - \mathbf{G}(0))u^\infty. \tag{2.13}$$

It is clear that the function  $s \mapsto (\mathbf{G}(s) - \mathbf{G}(0))u^\infty/s$  is in  $H^2(\mathbb{C}_\alpha, Y)$  and therefore, appealing to a well-known theorem due to Paley and Wiener, it follows from (2.13) that  $\mathbf{F}_\infty(u^\infty) - y^\infty \in L^2_\alpha(\mathbb{R}_+, Y)$ , which is (2.12).  $\square$

**Lemma 2.2.** *Suppose that  $\mathbf{T}$  is exponentially stable. Then, for all  $x^0 \in X$  and  $u \in L^2(\mathbb{R}_+, U)$ , the solution  $x(\cdot)$  of the initial-value problem (2.5) satisfies*

$$\lim_{t \rightarrow \infty} \|x(t)\| = 0, \quad x \in L^2(\mathbb{R}_+, X).$$

*Proof:* Let  $x_0 \in X$  and  $u \in L^2(\mathbb{R}_+, U)$  and assume that  $\mathbf{T}$  is exponentially stable. It has been shown in [21], Lemma 2.2, that under these assumptions  $x \in L^2(\mathbb{R}_+, X)$ . It remains to show that  $\lim_{t \rightarrow \infty} \|x(t)\| = 0$ . To this end note that by the exponential stability of  $\mathbf{T}$  and (2.3), there exists  $\beta > 0$  such that

$$\left\| \int_s^t \mathbf{T}_{t-\tau} B u(\tau) d\tau \right\| \leq \beta \left( \int_s^t \|u(\tau)\|^2 d\tau \right)^{1/2}, \quad t \geq s \geq 0. \tag{2.14}$$

Since  $u \in L^2(\mathbb{R}_+, U)$ , there exists  $s_1 \geq 0$  such that

$$\int_s^t \|u(\tau)\|^2 d\tau \leq \varepsilon^2/4\beta^2, \quad t \geq s \geq s_1. \tag{2.15}$$

Let  $\varepsilon > 0$ . By the exponential stability of  $\mathbf{T}$  there exists  $s_2 \geq 0$  such that

$$\|\mathbf{T}_t x(s_1)\| \leq \varepsilon/2, \quad \forall t \geq s_2. \tag{2.16}$$

Now

$$x(t) = \mathbf{T}_{t-s_1} x(s_1) + \int_{s_1}^t \mathbf{T}_{t-\tau} B u(\tau) d\tau,$$

and hence, by combining (2.14–2.16), we obtain for all  $t \geq s_1 + s_2$

$$\|x(t)\| \leq \|\mathbf{T}_{t-s_1} x(s_1)\| + \beta \left( \int_{s_1}^t \|u(\tau)\|^2 d\tau \right)^{1/2} \leq \varepsilon/2 + \varepsilon/2 = \varepsilon,$$

showing that  $\lim_{t \rightarrow \infty} \|x(t)\| = 0$ . □

The following lemma can be found in Salamon [25] (more precisely, it is part of Lem. 2.5 in [25]).

**Lemma 2.3.** *If  $x^0 \in X$  and  $u \in W_{\text{loc}}^{1,2}(\mathbb{R}_+, U)$  are such that  $Ax^0 + Bu(0) \in X$ , then the solution  $x(\cdot)$  of the initial-value problem (2.5) is continuously differentiable in  $X$ .*

Suppose that  $Y = U$  and consider the following nonlinear system

$$\dot{x}(t) = Ax(t) + B\phi(u(t)), \quad x(0) = x^0 \in X \tag{2.17a}$$

$$\dot{u}(t) = k\{r - C_L \mathbf{T}_t x^0 - [\mathbf{F}_\infty(\phi(u))](t)\}, \quad u(0) = u^0 \in U, \tag{2.17b}$$

where the reference vector  $r \in U$ , the gain parameter  $k \in \mathbb{R}$  and the nonlinearity  $\phi : U \rightarrow U$  satisfies a *local Lipschitz condition*, that is, for every bounded set  $W \subset U$  there exists a constant  $l \geq 0$  such that

$$\|\phi(u) - \phi(v)\| \leq l\|u - v\|, \quad \forall u, v \in W.$$

Of course,  $y(t) := C_L \mathbf{T}_t x^0 + [\mathbf{F}_\infty(\phi(u))](t)$  is the output of the well-posed system  $\Sigma$  corresponding to the initial condition  $x(0) = x^0$  and the input  $\phi \circ u$ , and so (2.17b) may be written in the compact form  $\dot{u}(t) = k(r - y(t))$ .

For  $T \in (0, \infty]$ , a continuous function

$$[0, T) \rightarrow X \times U, \quad t \mapsto (x(t), u(t))$$

is a *solution* of (2.17) if  $(x(\cdot), u(\cdot))$  is absolutely continuous as a  $(X_{-1} \times U)$ -valued function,  $(x(0), u(0)) = (x^0, u^0)$  and the differential equations in (2.17) are satisfied almost everywhere on  $[0, a)$ , where the derivative in (2.17a) should be interpreted in the space  $X_{-1}$ <sup>3</sup>. An application of a well-known result on abstract Cauchy problems

<sup>3</sup>Being a Hilbert space  $X_{-1} \times U$  is reflexive, and hence any absolutely continuous  $(X_{-1} \times U)$ -valued function is a.e. differentiable and can be recovered from its derivative by integration, see [3], Theorem 3.1 (p. 10).

(see Pazy [22], Th. 2.4, p. 107) shows that a continuous  $(X \times U)$ -valued function  $(x(\cdot), u(\cdot))$  is a solution of (2.17) if, and only if, it satisfies the following integrated version of (2.17)

$$x(t) = \mathbf{T}_t x^0 + \int_0^t \mathbf{T}_{t-\tau} B \phi(u(\tau)) d\tau, \tag{2.18a}$$

$$u(t) = u^0 + k \int_0^t [r - C_L \mathbf{T}_\tau x^0 - (\mathbf{F}_\infty \phi(u))(\tau)] d\tau. \tag{2.18b}$$

The next result asserts that (2.17) has a unique solution: under the assumption that  $\Sigma$  is regular, this has been established in [20] (see Prop. 3.1 in [20]). An inspection of the proof in [20] shows that it carries over to well-posed systems without any changes.

**Lemma 2.4.** *Let  $\phi : U \rightarrow U$  be locally Lipschitz. For each  $(x^0, u^0) \in X \times U$ , there exists a unique solution  $(x(\cdot), u(\cdot))$  of (2.17) defined on a maximal interval  $[0, T)$ . If  $T < \infty$ , then*

$$\limsup_{t \rightarrow T} (\|x(t)\| + \|u(t)\|) = \infty.$$

If  $\phi$  is globally Lipschitz, then  $T = \infty$ .

### 3. ABSOLUTE STABILITY RESULTS

In the following let  $\Sigma = (\mathbf{T}, \Phi, \Psi, \mathbf{F})$  be a well-posed linear system with state space  $X$ , input space  $U$ , output space  $Y = U$ , generating operators  $A, B$  and  $C$ , input-output operator  $\mathbf{F}_\infty$  and transfer function  $\mathbf{G}$ . In this section we consider the nonlinear system (2.17) with  $r = 0$  and  $k = 1$ , i.e.,

$$\dot{x}(t) = Ax(t) + B\phi(u(t)), \quad x(0) = x^0 \in X \tag{3.1a}$$

$$\dot{u}(t) = -C_L \mathbf{T}_t x^0 - [\mathbf{F}_\infty(\phi(u))](t), \quad u(0) = u^0 \in U. \tag{3.1b}$$

We assume that  $\phi$  is locally Lipschitz (in the sense of Sect. 2) and sector bounded, i.e., there exist numbers  $a \leq b$  such that

$$\langle \phi(v) - av, \phi(v) - bv \rangle \leq 0, \quad \forall v \in U. \tag{3.2}$$

Let  $\mathcal{S}[a, b]$  denote the set of all functions  $\phi : U \rightarrow U$  such that (3.2) holds. It is easy to show that (3.2) holds if and only if

$$\left\| \phi(v) - \frac{a+b}{2} v \right\| \leq \frac{b-a}{2} \|v\|, \quad \forall v \in U.$$

This shows in particular, that if  $\phi \in \mathcal{S}[a, b]$ , then the graph of  $\phi$  is contained in a (non-convex) cone with vertex at the origin. For  $a < b$  we define

$$\mathcal{S}[a, b] := \bigcup_{a \leq c < b} \mathcal{S}[a, c].$$

#### Stability in the large

The zero solution of (3.1) is called *stable in the large* if: (i) for all  $(x^0, u^0) \in X \times U$  there exists a solution of (3.1) on  $\mathbb{R}_+$  (i.e.  $T = \infty$  in Lem. 2.4); and (ii) there exists a continuous, strictly increasing function  $p : \mathbb{R}_+ \rightarrow \mathbb{R}_+$  with  $p(0) = 0$  and such that for any  $l > 0$  the solution of  $(x(\cdot), u(\cdot))$  of the initial value (3.1) satisfies

$$\|x^0\| + \|u^0\| \leq l \implies \|x(t)\| + \|u(t)\| \leq p(l), \quad \forall t \geq 0.$$



Let  $R, S \in \mathcal{B}(U_c)$ . If

$$\langle Rv, v \rangle \geq 0, \quad \forall v \in U_c,$$

we write  $R \geq 0$ ; if the above inequality is strict for all  $u \in U_c \setminus \{0\}$ , we write  $R > 0$ . Since  $U_c$  is a complex Hilbert space,  $R \geq 0$  implies that  $R = R^*$ . We write  $S \geq R$  if  $S - R \geq 0$ .

The following theorem shows that a suitable positive real condition in terms of the transfer function  $\mathbf{G}(s)/s$  will ensure that the zero solution of (3.1) is stable in the large if  $\Sigma$  is exponentially stable and  $\phi \in \mathcal{S}[0, b)$ .

**Theorem 3.1.** *Suppose that  $\Sigma$  is exponentially stable,  $\mathbf{G}(0)$  is invertible in  $\mathcal{B}(U)$  and  $\phi : U \rightarrow U$  is locally Lipschitz. Let  $(x^0, u^0) \in X \times U$ . If there exists  $b > 0$  such that*

$$I + \frac{b}{2} \left( \frac{1}{s} \mathbf{G}(s) + \frac{1}{\bar{s}} \mathbf{G}^*(s) \right) \geq 0, \quad \forall s \in \mathbb{C}_0, \tag{PR}$$

and if  $\phi \in \mathcal{S}[0, b)$ , then the following statements hold:

- (a) the zero solution of (3.1) is stable in the large;
- (b) the solution  $(x(\cdot), u(\cdot))$  of (3.1) satisfies

$$\lim_{t \rightarrow \infty} \|x(t)\| = 0, \quad x \in L^2(\mathbb{R}_+, X), \quad \lim_{t \rightarrow \infty} \|\phi(u(t))\| = 0, \quad \phi \circ u \in L^2(\mathbb{R}_+, U);$$

- (c) under the extra assumption that  $\dim U = 1$ ,  $u^\infty := \lim_{t \rightarrow \infty} u(t)$  exists, is finite and satisfies  $\phi(u^\infty) = 0$ .

**Remark 3.2.** (a) Since  $\Sigma$  is exponentially stable, it follows that  $\mathbf{G}(s)/s$  is holomorphic in  $\mathbb{C}_0$ . Combining this with (PR) shows that the function  $I + b \mathbf{G}(s)/s$  is positive real. As in the finite-dimensional case (see Anderson and Vongpanitlerd [2], p. 53), it can be shown that (PR) holds if and only if  $\mathbf{G}(0) = \mathbf{G}^*(0) \geq 0$  and

$$I + \frac{b}{2} \left( \frac{1}{i\omega} \mathbf{G}(i\omega) - \frac{1}{i\omega} \mathbf{G}^*(i\omega) \right) \geq 0, \quad \forall \omega \in \mathbb{R} \setminus \{0\}.$$

In this context it is interesting to note that there exists  $b > 0$  such that (PR) holds if and only if  $\mathbf{G}(0) = \mathbf{G}^*(0) \geq 0$  (see Logemann and Townley [21]).

- (b) Note that assertion (a) implies the boundedness of the solution  $(x(\cdot), u(\cdot))$  of (3.1) for all  $(x^0, u^0) \in X \times U$ .

(c) If  $\phi^{-1}(\{0\}) = \{0\}$  and  $\dim U = 1$ , then it follows from a combination of assertions (a)–(c) that the zero solution of (3.1) is globally asymptotically stable.

(d) Some of the statements in Theorem 3.1 remain true for time-varying sector bounded nonlinearities. More precisely, let  $\phi : \mathbb{R}_+ \times U \rightarrow U$ ,  $(t, v) \mapsto \phi(t, v)$  be continuous in  $t$  and locally Lipschitz in  $v$ , uniformly in  $t$  on bounded intervals. An inspection of the proof of Theorem 3.1 shows that statement (a) remains true for all such  $\phi$  satisfying

$$\langle \phi(t, v), \phi(t, v) - cv \rangle \leq 0, \quad \forall (t, v) \in \mathbb{R}_+ \times U$$

for some  $c \in [0, b)$ ; furthermore, apart from the convergence of  $\phi(t, u(t))$  to 0 as  $t \rightarrow \infty$ , statement (b) remains true also.

(e) Consider the feedback system shown in Figure 3, where  $\mathbf{H}(s)$  is the (rational) transfer function of a  $m$ -input,  $m$ -output, exponentially stable, finite-dimensional system and  $\phi : \mathbb{R}^m \rightarrow \mathbb{R}^m$  is a static nonlinearity. The circle criterion says that if

$$I + \frac{b}{2} (\mathbf{H}(i\omega) + \mathbf{H}^*(i\omega)) \geq 0, \quad \forall \omega \in \mathbb{R},$$

then for all locally Lipschitz  $\phi \in \mathcal{S}[0, b)$ , the closed-loop system shown in Figure 3 is globally exponentially stable (see [13], p. 409 and [28], p. 227). Hence Theorem 3.1 can be considered as an extension of the circle criterion to the case where  $\mathbf{H}(s)$  is of the form  $\mathbf{H}(s) = \mathbf{G}(s)/s$  with  $\mathbf{G}$  being the transfer function of an exponentially stable well-posed infinite-dimensional system, *i.e.* the plant is the series interconnection of an exponentially stable well-posed infinite-dimensional system and an integrator.

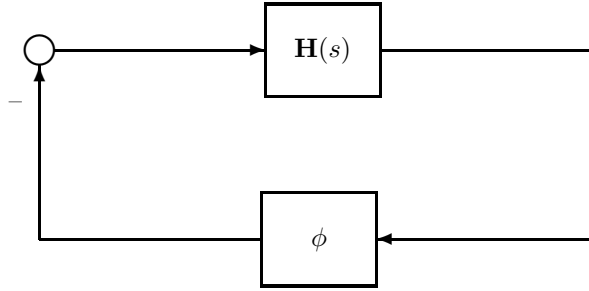


Figure 3

(f) For exponentially stable single-input single-output systems with bounded control and bounded observation, the stability properties of the zero solution of (3.1) have been investigated in [33] under the assumption that  $\phi$  is locally Lipschitz,  $\phi(v)v > 0$  for  $v \neq 0$  and  $\lim_{|v| \rightarrow \infty} \int_0^v \phi(w) dw = \infty$ . It is shown in [33] that for all such  $\phi$ , the zero solution of (3.1) is uniformly asymptotically stable in the large, provided that

$$\operatorname{Re} \mathbf{G}(i\omega) \geq \varepsilon > 0, \quad \forall \omega \in \mathbb{R}, \tag{3.3}$$

i.e.,  $\mathbf{G}$  is positive-real in a strict sense<sup>4</sup>. Trivially, there are many examples where (3.3) is not satisfied, whilst (PR) holds for some  $b > 0$ .  $\diamond$

*Proof of Theorem 3.1:* Let  $(x^0, u^0) \in X \times U$ . By Lemma 2.4 the corresponding solution of the initial-value problem (3.1), denoted by  $(x(\cdot), u(\cdot))$ , exists on a maximal interval  $[0, T)$  (where  $0 < T \leq \infty$ ) and is unique. Set  $Q := \mathbf{G}(0)$  and define for  $t \in [0, T)$

$$z(t) := A^{-1}x(t), \quad v(t) := Q^{-1}(Cz(t) + u(t)). \tag{3.4}$$

We proceed in several steps.

**Step 1:** A differential equation for  $(z, v)$ .

We claim that  $(z(t), v(t))$  is continuously differentiable in  $X \times U$  for all  $t \in (0, T)$  and satisfies

$$\dot{z}(t) = Az(t) + A^{-1}B\phi(u(t)), \quad z(0) = z^0 \in X_1, \quad \forall t \in (0, T), \tag{3.5a}$$

$$\dot{v}(t) = -\phi(u(t)), \quad v(0) = v^0 \in U, \quad \forall t \in (0, T), \tag{3.5b}$$

where  $z^0 := A^{-1}x^0$  and  $v^0 := Q^{-1}(CA^{-1}x^0 + u^0)$ .

Using the continuity of the functions  $t \mapsto \phi(u(t))$  and

$$[0, T) \rightarrow X, \quad t \mapsto \int_0^t \mathbf{T}_{t-\tau} B \phi(u(\tau)) d\tau,$$

it follows from a well-known result on the existence of classical solutions to abstract Cauchy problems (see Pazy [22], p. 107) that for all  $t \in (0, T)$ ,  $x(t)$  is continuously differentiable in  $X_{-1}$  and (3.1a) holds. As a consequence,  $z(t)$  is continuously differentiable in  $X$  for all  $t \in (0, T)$  and (3.5a) holds. The proof of the claim for  $v(t)$  is more difficult and requires an approximation argument. To this end let  $T_0 \in (0, T)$  be arbitrary.

<sup>4</sup> If the underlying semigroup is analytic, then this result remains true for unbounded control action, see [4].

Choose  $x_n^0 \in X_1$  and  $w_n \in W^{1,2}([0, T_0], U)$  with  $w_n(0) = 0$  such that

$$\lim_{n \rightarrow \infty} \|x^0 - x_n^0\| = 0, \quad \lim_{n \rightarrow \infty} \|\phi(u) - w_n\|_{L^2(0, T; U)} = 0. \tag{3.6}$$

Consider the initial-value problem

$$\dot{\zeta}(t) = A\zeta(t) + Bw_n(t), \quad \zeta(0) = x_n^0, \tag{3.7a}$$

$$\dot{\eta}(t) = -C\mathbf{T}_t x_n^0 - (\mathbf{F}_\infty w_n)(t), \quad \eta(0) = u^0, \tag{3.7b}$$

and denote its solution by  $(x_n(\cdot), u_n(\cdot))$ . Denoting the output function of  $\Sigma$  corresponding to the initial value  $x_n^0$  and the control  $w_n(\cdot)$  by  $y_n(\cdot)$ , it is clear that the right-hand side of (3.7b) is equal to  $-y_n(t)$ . By Lemma 2.3,  $x_n$  is continuously differentiable in  $X$  and hence the function defined by

$$v_n(t) := Q^{-1}[CA^{-1}x_n(t) + u_n(t)] \tag{3.8}$$

is absolutely continuous with derivative

$$\begin{aligned} \dot{v}_n(t) &= Q^{-1}(C[x_n(t) + A^{-1}Bw_n(t)] - y_n(t)) \\ &= Q^{-1}\left(C[\mathbf{T}_t x_n^0 + \int_0^t \mathbf{T}_{t-\tau} Bw_n(\tau) d\tau + A^{-1}Bw_n(t)] - y_n(t)\right), \quad \text{a.e. } t \in [0, T_0]. \end{aligned}$$

Invoking (2.7), we obtain

$$\dot{v}_n(t) = -Q^{-1}\mathbf{G}(0)w_n(t) = -w_n(t), \quad \text{a.e. } t \in [0, T_0],$$

and thus

$$v_n(t) = v_n(0) - \int_0^t w_n(\tau) d\tau, \quad \forall t \in [0, T_0]. \tag{3.9}$$

From (3.6) it follows *via* standard properties of well-posed systems that for all  $t \in [0, T_0]$

$$\lim_{n \rightarrow \infty} \|x_n(t) - x(t)\| = 0, \quad \lim_{n \rightarrow \infty} u_n(t) = u(t),$$

and therefore, by (3.4) and (3.8)

$$\lim_{n \rightarrow \infty} v_n(t) = v(t), \quad \forall t \in [0, T_0].$$

On the other hand, by (3.6) and (3.9)

$$\lim_{n \rightarrow \infty} v_n(t) = v^0 - \int_0^t \phi(u(\tau)) d\tau, \quad \forall t \in [0, T_0],$$

showing that

$$v(t) = v^0 - \int_0^t \phi(u(\tau)) d\tau, \quad \forall t \in [0, T_0],$$

which upon differentiation yields (3.5b).

**Step 2:** Exploiting the positive-real condition (PR).

By assumption,  $\phi \in \mathcal{S}[0, b)$ , and hence there exists  $\tilde{b} \in (0, b)$  such that

$$\phi \in \mathcal{S}[0, \tilde{b}]. \tag{3.10}$$

Choose  $c \in (\tilde{b}, b)$ . We consider the quadruple  $\Xi = (A, A^{-1}B, C, c^{-1}I)$  of operators, which are the generating operators of an exponentially stable Pritchard-Salamon system<sup>5</sup> on the spaces  $X_1 \hookrightarrow X$  (this implies that  $\Xi$  defines an exponentially stable regular system). The function

$$\mathbf{H}(s) = C(sI - A)^{-1}A^{-1}B + \frac{1}{c}I$$

is the transfer function of  $\Xi$ . By (2.9) we have

$$\mathbf{H}(s) = \frac{1}{s}(\mathbf{G}(s) - \mathbf{G}(0)) + \frac{1}{c}I = \frac{1}{s}(\mathbf{G}(s) - Q) + \frac{1}{c}I, \quad \forall s \in \rho(A), s \neq 0.$$

It is not difficult to show that (PR) implies that  $Q = \mathbf{G}(0) \geq 0$ , and hence, in particular,  $Q = Q^*$  (this can be proved exactly as in the finite-dimensional case, see [2], p. 53; cf. also Rem. 3.2, Part (a)). Therefore, since  $0 < c < b$ , (PR) guarantees the existence of a constant  $\varepsilon > 0$  such that

$$\mathbf{H}(i\omega) + \mathbf{H}^*(i\omega) \geq \varepsilon I, \quad \forall \omega \in \mathbb{R}.$$

Consequently, by the positive-real Riccati equation theory for Pritchard-Salamon systems in van Keulen [16] (see Th. 3.10 and Rem. 3.14 in [16]), there exists  $\tilde{P} \in \mathcal{B}(X)$ ,  $\tilde{P} = \tilde{P}^*$ , such that

$$\langle Ax_1, \tilde{P}x_2 \rangle + \langle \tilde{P}x_1, Ax_2 \rangle = \frac{c}{2} \langle [(A^{-1}B)^*\tilde{P} + C]x_1, [(A^{-1}B)^*\tilde{P} + C]x_2 \rangle, \quad \forall x_1, x_2 \in X_1. \quad (3.11)$$

Setting

$$P := -\tilde{P} \in \mathcal{B}(X), \quad L := \sqrt{\frac{c}{2}} [C - (A^{-1}B)^*P] \in \mathcal{B}(X_1, U),$$

we obtain using (3.11)

$$\langle Ax_1, Px_2 \rangle + \langle Px_1, Ax_2 \rangle = -\langle Lx_1, Lx_2 \rangle, \quad \forall x_1, x_2 \in X_1 \quad (3.12a)$$

$$(A^{-1}B)^*Px_1 = Cx_1 - \sqrt{2/c}Lx_1, \quad \forall x_1 \in X_1. \quad (3.12b)$$

Moreover, by a routine argument it follows from (3.12a) and the exponential stability of the semigroup  $\mathbf{T}_t$  that  $P \geq 0$ . Note that the existence of solutions  $L$  and  $P = P^* \geq 0$  to the Lure equations (3.12) is the content of the Kalman-Yakubovich lemma in the context of the infinite-dimensional system  $\Xi$ .

**Step 3:** A Lyapunov-type argument.

For  $t \in [0, T)$  define

$$V(t) := \langle z(t), Pz(t) \rangle + \langle v(t), Qv(t) \rangle \geq 0. \quad (3.13)$$

By Step 1,  $V$  is continuously differentiable. Differentiating  $V$  and using (3.5, 3.12) and the definition of  $v$  (see (3.4)) yields for all  $t \in [0, T)$

$$\begin{aligned} \dot{V}(t) &= -\|Lz(t)\|^2 + 2\langle \phi(u(t)), Cz(t) - \sqrt{2/c}Lz(t) \rangle - 2\langle \phi(u(t)), Qv(t) \rangle \\ &= -\|Lz(t)\|^2 - 2\sqrt{2/c}\langle \phi(u(t)), Lz(t) \rangle - 2\langle \phi(u(t)), u(t) \rangle. \end{aligned}$$

Completing the square gives for all  $t \in [0, T)$

$$\dot{V}(t) = -\|Lz(t) + \sqrt{2/c}\phi(u(t))\|^2 + \frac{2}{c}(\|\phi(u(t))\|^2 - c\langle \phi(u(t)), u(t) \rangle). \quad (3.14)$$

<sup>5</sup> See [9, 16] for the concept of a Pritchard-Salamon system.

Since  $c > \tilde{b}$  there exists  $\delta > 0$  such that  $c = \tilde{b} + \delta$  and therefore, using (3.10), we obtain for all  $t \in [0, T]$

$$\begin{aligned} \|\phi(u(t))\|^2 - c\langle\phi(u(t)), u(t)\rangle &= \langle\phi(u(t)), \phi(u(t)) - \tilde{b}u(t)\rangle - \delta\langle\phi(u(t)), u(t)\rangle \\ &\leq -\delta\langle\phi(u(t)), u(t)\rangle \leq -\frac{\delta}{\tilde{b}}\|\phi(u(t))\|^2. \end{aligned}$$

Using this inequality in (3.14), it follows that

$$\dot{V}(t) \leq -\frac{2\delta}{\tilde{b}c}\|\phi(u(t))\|^2, \quad \forall t \in [0, T].$$

Hence, since  $V(t) \geq 0$ , integration leads to

$$\int_0^t \|\phi(u(\tau))\|^2 d\tau \leq \frac{\tilde{b}c}{2\delta}V(0), \quad \forall t \in [0, T]. \tag{3.15}$$

The inequality (3.15) shows that  $\phi \circ u \in L^2(0, T; U)$ . Combining this with the well-posedness and the exponential stability of  $\Sigma$ , we may conclude that  $x(t)$  is bounded on the interval  $[0, T]$  and  $\dot{u} \in L^2(0, T; U)$ . This implies the boundedness of  $(x(t), u(t))$  on  $[0, T]$  if  $T < \infty$ , and hence, by the maximality of  $T$ , it follows *via* Lemma 2.4 that  $T = \infty$ . Therefore the solution  $(x(t), u(t))$  exists for all  $t \geq 0$  and by (3.15)

$$\int_0^\infty \|\phi(u(\tau))\|^2 d\tau \leq \frac{\tilde{b}c}{2\delta}V(0). \tag{3.16}$$

**Step 4:** Proof of statement (a) – stability in the large.

As an immediate consequence of the exponential stability of  $\Sigma$ , (2.3, 3.4, 3.13) and (3.16) there exist constants  $\alpha_1, \alpha_2, \alpha_3 > 0$  not depending on  $x^0$  and  $u^0$  and such that

$$\|x(t)\|^2 \leq \alpha_1(\|x^0\|^2 + V(0)) \leq \alpha_2(\|x^0\|^2 + \|A^{-1}x^0\|^2 + \|CA^{-1}x^0 + u^0\|^2) \leq \alpha_3(\|x^0\|^2 + \|u^0\|^2). \tag{3.17}$$

Moreover, as was pointed out in Step 2, (PR) implies that  $Q = Q^* \geq 0$ . Combining this with the invertibility of  $Q$ , it follows from standard results on positive operators (see *e.g.* Rudin [23], p. 314) that the map  $w \mapsto \langle w, Qw \rangle^{1/2}$  defines a new norm on  $U$  which is equivalent to the original norm on  $U$ . Therefore, using (3.13), the fact that  $V(t)$  is non-increasing and  $P \geq 0$ , we may conclude that

$$\|v(t)\|^2 \leq \beta_1 V(0) \leq \beta_2(\|x^0\|^2 + \|u^0\|^2),$$

for some constants  $\beta_1, \beta_2 > 0$  which do not depend on  $x^0$  and  $u^0$ . From the definition of  $v(t)$  (see (3.4)) it follows that

$$\|Q^{-1}u(t)\|^2 \leq 2\beta_2(\|x^0\|^2 + \|u^0\|^2) + 2\|Q^{-1}CA^{-1}x(t)\|^2.$$

Combining this with (3.17) yields the existence of a constant  $\beta_3 > 0$  (not depending on  $x^0$  and  $u^0$ ) such that

$$\|u(t)\|^2 \leq \beta_3(\|x^0\|^2 + \|u^0\|^2). \tag{3.18}$$

Statement (a) now follows from (3.17) and (3.18).

**Step 5:** Proof of statement (b) – asymptotic behaviour of  $x$  and  $\phi \circ u$ .

Note that by (3.16),

$$\phi \circ u \in L^2(\mathbb{R}_+, U), \tag{3.19}$$

and hence, by Lemma 2.2,  $x \in L^2(\mathbb{R}_+, X)$  and  $\lim_{t \rightarrow \infty} \|x(t)\| = 0$ . It only remains to show that  $\lim_{t \rightarrow \infty} \phi(u(t)) = 0$ . To this end note, that that by statement (a) proved in Step 4,  $u(\cdot)$  is bounded, *i.e.* there exists a number  $\gamma > 0$  such that

$$\|u(t)\| \leq \gamma, \quad \forall t \geq 0. \tag{3.20}$$

Moreover, by the exponential stability of  $\Sigma$  we obtain from (3.1b) and (3.19) that  $\dot{u} \in L^2(\mathbb{R}_+, U)$ , which implies in particular that  $u(\cdot)$  is uniformly continuous. By (3.20) and the local Lipschitz property of  $\phi$ , the restricted map  $\phi|_{\text{im } u}$  is globally Lipschitz, and therefore, using the uniform continuity of  $u(\cdot)$ , we may conclude that  $\phi \circ u$  is uniformly continuous. Combining this with (3.19) and applying Barbălat’s lemma (see [13], p. 192) shows that  $\lim_{t \rightarrow \infty} \phi(u(t)) = 0$ .

**Step 6:** Proof of statement (c) – asymptotic behaviour of  $u$ .

Assume that  $\dim U = 1$ , *i.e.*  $U = \mathbb{R}$ . Note, that by Step 3,  $V_\infty := \lim_{t \rightarrow \infty} V(t)$  exists and is finite (since  $V(\cdot)$  is non-negative and non-increasing). Combining this with the fact that  $\lim_{t \rightarrow \infty} \|x(t)\| = 0$ , we may conclude from (3.4) and (3.13) that  $\lim_{t \rightarrow \infty} u(t) = u^\infty$  exists and is finite. By continuity of  $\phi$  and statement (b), it follows that  $\phi(u^\infty) = \lim_{t \rightarrow \infty} \phi(u(t)) = 0$ .  $\square$

In the following we introduce extra assumptions on the nonlinearity  $\phi$  which will guarantee that  $u(t)$  converges as  $t \rightarrow \infty$  in the case that  $\dim U > 1$ .

**Corollary 3.3.** *Suppose that the assumptions of Theorem 3.1 hold. If there exists  $b > 0$  such that (PR) is satisfied, if  $\phi \in \mathcal{S}[0, b)$  and if the extra assumptions*

(A1)  $\phi^{-1}(\{0\}) \cap W$  *is finite for any bounded set*  $W \subset U$ ,

(A2)  $\inf_{w \in W} \|\phi(w)\| > 0$  *for any bounded, closed and nonempty set*  $W \subset U$  *with*  $\phi^{-1}(\{0\}) \cap W = \emptyset$ ,

*are satisfied, then statements (a) and (b) of Theorem 3.1 hold. Moreover, the limit*  $u^\infty := \lim_{t \rightarrow \infty} u(t)$  *exists, is finite and*  $\phi(u^\infty) = 0$ .

**Remark 3.4.** Of course, assumption (A2) is automatically satisfied if  $\dim U < \infty$ . Corollary 3.3 shows in particular that if  $\phi^{-1}(\{0\}) = \{0\}$  and (A2) holds, then the zero solution of (3.1) is globally asymptotically stable.  $\diamond$

*Proof of Corollary 3.3:* Let  $(x(\cdot), u(\cdot))$  denote the solution of (3.1). Clearly, since the assumptions of Theorem 3.1 are satisfied, statements (a) and (b) of Theorem 3.1 hold. Therefore, in particular,  $\text{im } u$  is bounded and

$$\lim_{t \rightarrow \infty} \phi(u(t)) = 0. \tag{3.21}$$

By assumption (A1), the set  $Z := \phi^{-1}(\{0\}) \cap \text{clos}(\text{im } u)$  is finite. Moreover, by (A2) and (3.21),  $Z \neq \emptyset$ . Note that since  $(x(\cdot), u(\cdot))$  is the solution of (3.1),  $u(\cdot)$  is (absolutely) continuous. So it is sufficient to show that

$$\lim_{t \rightarrow \infty} \text{dist}(u(t), Z) = 0, \tag{3.22}$$

since by finiteness of  $Z$  and continuity of  $u$ , (3.22) implies that for all sufficiently large  $t$ ,  $u(t)$  lies in a neighbourhood of exactly one point of  $Z$  and hence  $u_\infty := \lim_{t \rightarrow \infty} u(t)$  exists with  $u_\infty \in Z \subset \phi^{-1}(\{0\})$ .

Seeking a contradiction, suppose that (3.22) is not true. Then there exist a sequence  $(t_n) \subset \mathbb{R}_+$  with  $\lim_{n \rightarrow \infty} t_n = \infty$  and a number  $\varepsilon > 0$  such that

$$u(t_n) \notin \{v \in U : \text{dist}(v, Z) < \varepsilon\} =: Z_\varepsilon.$$

Defining  $W := \text{clos}(\text{im } u \setminus Z_\varepsilon)$ , it follows that  $W$  is closed, bounded and  $\phi^{-1}(\{0\}) \cap W = \emptyset$ . Consequently, by assumption (A2), there exists  $\delta > 0$  such that  $\|\phi(w)\| \geq \delta$  for all  $w \in W$ . Since  $u(t_n) \in W$  for all  $n \in \mathbb{N}$ , we obtain that  $\|\phi(u(t_n))\| \geq \delta$  for all  $n \in \mathbb{N}$ , contradicting (3.21).  $\square$

**Exponential stability**

The following theorem shows that under the assumptions of Theorem 3.1 the zero solution of (3.1) is globally exponentially stable, provided that  $\phi \in \mathcal{S}[a, b]$  for some  $a \in (0, b)$  (i.e., the nonlinearity  $\phi$  is assumed to satisfy a more restrictive sector condition than in Th. 3.1).

**Theorem 3.5.** *Suppose that  $\Sigma$  is exponentially stable,  $\mathbf{G}(0)$  is invertible and  $\phi : U \rightarrow U$  is locally Lipschitz. If there exists  $b > 0$  such that (PR) holds and if  $\phi \in \mathcal{S}[a, b]$  for some  $a \in (0, b)$ , then the zero solution of (3.1) is globally exponentially stable, that is, there exist  $N \geq 1$  and  $\nu \in (\omega(\mathbf{T}), 0)$  such that for all  $(x^0, u^0) \in X \times U$  the solution  $(x(\cdot), u(\cdot))$  of (3.1) satisfies*

$$\|x(t)\| + \|u(t)\| \leq Ne^{\nu t}(\|x^0\| + \|u^0\|), \quad \forall t \geq 0.$$

*Proof:* Let  $K$  be the supremum of all numbers  $k > 0$  such that

$$I + \frac{k}{2} \left( \frac{1}{s} \mathbf{G}(s) + \frac{1}{\bar{s}} \mathbf{G}^*(s) \right) \geq 0, \quad \forall s \in \mathbb{C}_0.$$

By assumption,  $K \geq b > 0$ . Since  $\phi \in \mathcal{S}[a, b]$ , there exists  $c \in (a, b)$  such that  $\phi \in \mathcal{S}[a, c]$ . Let  $\delta \in (0, a)$  such that  $c + \delta < K$ . We define

$$\kappa := \frac{c + \delta}{2} < \frac{K}{2}, \quad \mathbf{H}(s) := \frac{1}{s} \mathbf{G}(s) \left( I + \frac{\kappa}{s} \mathbf{G}(s) \right)^{-1}, \quad \mathbf{L}(s) := \frac{1}{s} \left( I + \frac{\kappa}{s} \mathbf{G}(s) \right)^{-1}.$$

We know from [21]<sup>6</sup> that

$$\mathbf{H}, \mathbf{L} \in H^\infty(\mathbb{C}_0, \mathcal{B}(U)). \tag{3.23}$$

Moreover, Lemma 3.10 in [21] yields

$$\|\mathbf{H}\|_\infty = \sup_{s \in \mathbb{C}_0} \|\mathbf{H}(s)\| = \frac{1}{\kappa}. \tag{3.24}$$

Setting

$$\psi(v) := \phi(v) - \kappa v, \quad \gamma := \frac{c - \delta}{2}$$

and using the fact that  $\phi \in \mathcal{S}[a, c] \subset \mathcal{S}[\delta, c]$ , we obtain

$$\|\psi(v)\| \leq \gamma \|v\|, \quad \forall v \in U. \tag{3.25}$$

Clearly,  $\kappa > \gamma$ , and hence by (3.24)

$$\gamma \|\mathbf{H}\|_\infty < 1. \tag{3.26}$$

Let  $\varepsilon \in (0, \delta)$  be sufficiently small such that the semigroup  $e^{\varepsilon t} \mathbf{T}_t$  is exponentially stable,

$$\mathbf{H}, \mathbf{L} \in H^\infty(\mathbb{C}_{-\varepsilon}, \mathcal{B}(U)), \tag{3.27}$$

and

$$\gamma \sup_{s \in \mathbb{C}_{-\varepsilon}} \|\mathbf{H}(s)\| < 1. \tag{3.28}$$

---

<sup>6</sup> The results in [21] are proved for matrix-valued  $\mathbf{G}$ , i.e.  $\dim U < \infty$ . However, it is easy to see that the relevant results in [21] extend to infinite-dimensional input spaces  $U$ .

For all sufficiently small  $\varepsilon > 0$ , (3.27) follows *via* a routine argument from (3.23) and the fact that  $\mathbf{G} \in H^\infty(\mathbb{C}_{-\varepsilon}, \mathcal{B}(U))$ , whilst (3.28) is a consequence of (3.26) and (3.27) combined with the fact that a holomorphic function which is bounded in an open vertical strip in the complex plane is uniformly continuous in any closed vertical substrip (see [8], p. 72).

Let  $(x^0, u^0) \in X \times U$  and let  $(x(\cdot), u(\cdot))$  denote the solution of (3.1) which satisfies the initial conditions  $x(0) = x^0$  and  $u(0) = u^0$ . Rewrite (3.1b) in the form

$$\dot{u}(t) = -(\Psi_\infty x^0)(t) - (\mathbf{F}_\infty(\psi \circ u + \kappa u))(t), \quad \text{a.e. } t \geq 0. \quad (3.29)$$

By Theorem 3.1,  $u$  is bounded and  $\dot{u} \in L^2(\mathbb{R}_+, U)$ . Thus the Laplace transforms  $(\mathcal{L}(u))(s)$ ,  $(\mathcal{L}(\psi \circ u))(s)$  and  $(\mathcal{L}(\dot{u}))(s)$  exist for all  $s \in \mathbb{C}_0$  and an application of the Laplace transform to (3.29) combined with a straightforward calculation yields

$$(\mathcal{L}(u))(s) = \mathbf{L}(s)u^0 - \mathbf{L}(s)C(sI - A)^{-1}x^0 - \mathbf{H}(s)(\mathcal{L}(\psi \circ u))(s), \quad \forall s \in \mathbb{C}_0. \quad (3.30)$$

Define bounded operators  $H, L$  from  $L^2(\mathbb{R}_+, U)$  to  $L^2(\mathbb{R}_+, U)$  by setting

$$Hv = \mathcal{L}^{-1}(\mathbf{H}\mathcal{L}(v)), \quad Lv = \mathcal{L}^{-1}(\mathbf{L}\mathcal{L}(v)); \quad \forall v \in L^2(\mathbb{R}_+, U).$$

By (3.27),  $H$  and  $L$  restrict to bounded operators from  $L^2_{-\varepsilon}(\mathbb{R}_+, U)$  to  $L^2_{-\varepsilon}(\mathbb{R}_+, U)$ . The  $L^2_{-\varepsilon}(\mathbb{R}_+, U)$ -induced operator norms of  $H$  and  $L$  are given by

$$\sup_{s \in \mathbb{C}_{-\varepsilon}} \|\mathbf{H}(s)\| =: h \quad \text{and} \quad \sup_{s \in \mathbb{C}_{-\varepsilon}} \|\mathbf{L}(s)\| =: l, \quad (3.31)$$

respectively. Taking inverse Laplace transforms in (3.30), we obtain

$$u = \mathcal{L}^{-1}(\mathbf{L}u^0) - L(\Psi_\infty x^0) - H(\psi \circ u).$$

Taking the  $L^2_{-\varepsilon}$ -norm of  $\mathbf{P}_t u$  (where  $t \geq 0$ ), using the causality of  $H$  and estimating gives

$$\begin{aligned} \left( \int_0^t \|e^{\varepsilon\tau} u(\tau)\|^2 d\tau \right)^{1/2} &\leq \left( \int_0^\infty \|e^{\varepsilon\tau} (\mathcal{L}^{-1}(\mathbf{L}u^0))(\tau)\|^2 d\tau \right)^{1/2} + l \left( \int_0^\infty \|e^{\varepsilon\tau} C_L \mathbf{T}_\tau x^0\|^2 d\tau \right)^{1/2} \\ &\quad + h \left( \int_0^t \|e^{\varepsilon\tau} \psi(u(\tau))\|^2 d\tau \right)^{1/2}, \quad \forall t \geq 0. \end{aligned} \quad (3.32)$$

It is clear that the function  $s \mapsto \mathbf{L}(s)u^0$  is in  $H^2(\mathbb{C}_{-\varepsilon}, U)$ , and therefore by a well-known theorem due to Paley and Wiener

$$\int_0^\infty \|e^{\varepsilon\tau} (\mathcal{L}^{-1}(\mathbf{L}u^0))(\tau)\|^2 d\tau = \frac{1}{2\pi} \sup_{\alpha > -\varepsilon} \int_{-\infty}^\infty \|\mathbf{L}(\alpha + i\omega)u^0\|^2 d\omega \leq N_1^2 \|u^0\|^2, \quad (3.33)$$

where

$$N_1 := \left( \frac{1}{2\pi} \sup_{\alpha > -\varepsilon} \int_{-\infty}^\infty \|\mathbf{L}(\alpha + i\omega)\|^2 d\omega \right)^{1/2} < \infty.$$

Combining (3.25, 3.32, 3.33) and using the exponential stability of  $e^{\varepsilon t} \mathbf{T}_t$ , we may conclude that there exists  $N_2 > 0$  (not depending on  $x^0$  and  $u^0$ ) such that

$$\left( \int_0^t \|e^{\varepsilon\tau} u(\tau)\|^2 d\tau \right)^{1/2} \leq N_1 \|u^0\| + N_2 \|x^0\| + \gamma h \left( \int_0^t \|e^{\varepsilon\tau} u(\tau)\|^2 d\tau \right)^{1/2}, \quad \forall t \geq 0.$$



By (3.28) and (3.31),  $\gamma h < 1$ , and therefore,  $u \in L^2_{-\varepsilon}(\mathbb{R}_+, U)$ , and, moreover,

$$\left( \int_0^\infty \|e^{\varepsilon\tau} u(\tau)\|^2 d\tau \right)^{1/2} \leq N_3(\|x^0\| + \|u^0\|), \tag{3.34}$$

where

$$N_3 := \frac{\max(N_1, N_2)}{1 - \gamma h}.$$

Furthermore, since  $\mathbf{F}_\infty$  is bounded from  $L^2_{-\varepsilon}(\mathbb{R}_+, U)$  to  $L^2_{-\varepsilon}(\mathbb{R}_+, U)$  with  $L^2_{-\varepsilon}$ -induced operator norm equal to

$$f_\infty := \sup_{s \in \mathbb{C}_{-\varepsilon}} \|\mathbf{G}(s)\|$$

and  $\phi \in \mathcal{S}[a, c]$ , it follows from (3.34) that

$$\left( \int_0^\infty \|e^{\varepsilon\tau} (\mathbf{F}_\infty \phi(u))(\tau)\|^2 d\tau \right)^{1/2} \leq N_3 f_\infty c (\|x^0\| + \|u^0\|). \tag{3.35}$$

In order to obtain an exponential estimate for  $x(t)$ , we multiply the integrated version of (3.1a) by  $e^{\varepsilon t}$  to obtain

$$e^{\varepsilon t} x(t) = e^{\varepsilon t} \mathbf{T}_t x^0 + \int_0^t e^{\varepsilon(t-\tau)} \mathbf{T}_{t-\tau} B e^{\varepsilon\tau} \phi(u(\tau)) d\tau, \quad \forall t \geq 0.$$

Using the exponential stability of the semigroup  $e^{\varepsilon t} \mathbf{T}_t$  and the fact that  $\phi \in \mathcal{S}[a, b]$ , it follows that there exists a constant  $N_4 \geq 1$  (not depending on  $x^0$  and  $u^0$ ) such that

$$e^{\varepsilon t} \|x(t)\| \leq N_4 \left[ \|x^0\| + \left( \int_0^t \|e^{\varepsilon\tau} u(\tau)\|^2 d\tau \right)^{1/2} \right], \quad \forall t \geq 0.$$

Combining this with (3.34) shows that

$$e^{\varepsilon t} \|x(t)\| \leq N_5 (\|x^0\| + \|u^0\|), \quad \forall t \geq 0, \tag{3.36}$$

for some  $N_5 \geq 1$  (not depending on  $x^0$  and  $u^0$ ).

Finally, to derive an exponential estimate for  $u(t)$ , let  $\eta \in (0, \varepsilon)$ . Using (3.1b), a straightforward calculation gives

$$\frac{d}{dt}(e^{\eta t} u(t)) = -e^{(\eta-\varepsilon)t} C_L e^{\varepsilon t} \mathbf{T}_t x^0 - e^{(\eta-\varepsilon)t} [e^{\varepsilon t} (\mathbf{F}_\infty \phi(u))(t)] + \eta e^{(\eta-\varepsilon)t} [e^{\varepsilon t} u(t)], \quad \text{a.e. } t \geq 0. \tag{3.37}$$

Clearly, the functions

$$t \mapsto e^{(\eta-\varepsilon)t}, \quad t \mapsto C_L e^{\varepsilon t} \mathbf{T}_t x^0$$

are in  $L^2(\mathbb{R}_+, \mathbb{R})$  and  $L^2(\mathbb{R}_+, U)$ , respectively. Moreover, by (3.34) and (3.35) the functions

$$t \mapsto e^{\varepsilon t} u(t), \quad t \mapsto e^{\varepsilon t} (\mathbf{F}_\infty \phi(u))(t)$$

are in  $L^2(\mathbb{R}_+, U)$ . Integrating (3.37), using the Cauchy-Schwarz inequality and invoking (3.34) and (3.35) shows that there exists a constant  $N_6 \geq 1$  (not depending on  $x^0$  and  $u^0$ ) such that

$$e^{\eta t} \|u(t)\| \leq N_6 (\|x^0\| + \|u^0\|), \quad \forall t \geq 0. \tag{3.38}$$

The claim now follows from (3.36) and (3.38) with  $N = 2 \max(N_5, N_6)$  and  $\nu = -\eta$ . □

For  $W \subset U$  and  $a \leq b$ , let  $\mathcal{S}_W[a, b]$  denote the set of all functions  $\phi : U \rightarrow U$  such that

$$\langle \phi(w) - aw, \phi(w) - bw \rangle \leq 0, \quad \forall w \in W.$$

For  $a < b$  we define

$$\mathcal{S}_W[a, b] := \bigcup_{a \leq c < b} \mathcal{S}_W[a, c].$$

Of course,  $\mathcal{S}_U[a, b] = \mathcal{S}[a, b]$  and  $\mathcal{S}_U[a, b] = \mathcal{S}[a, b]$ .

Theorem 3.1 and Theorem 3.5 can be used to derive the following semi-global exponential stability result. The assumptions on the nonlinearity  $\phi$  are more restrictive than in Theorem 3.1, but less restrictive than in Theorem 3.5.

**Theorem 3.6.** *Suppose that  $\Sigma$  is exponentially stable,  $\mathbf{G}(0)$  is invertible,  $\phi : U \rightarrow U$  is locally Lipschitz and there exists  $b > 0$  such that (PR) holds. If  $\phi \in \mathcal{S}[0, b)$  and  $\phi$  satisfies the two extra assumptions*

(A3)  $\phi \in \mathcal{S}_V[a, b]$  for some open set  $V \subset U$  with  $0 \in V$  and some  $a \in (0, b)$ ,

(A4)  $\inf_{w \in W} \|\phi(w)\| > 0$  for any bounded, closed, nonempty set  $W \subset U$  with  $0 \notin W$ ,

then the zero solution of (3.1) is semi-globally exponentially stable, that is, for every  $M > 0$ , there exists  $N \geq 1$  and  $\nu \in (\omega(\mathbf{T}), 0)$  such that for all  $(x^0, u^0) \in X \times U$  with  $\|x^0\| + \|u^0\| \leq M$ , the solution  $(x(\cdot), u(\cdot))$  of (3.1) satisfies

$$\|x(t)\| + \|u(t)\| \leq Ne^{\nu t} (\|x^0\| + \|u^0\|), \quad \forall t \geq 0.$$

Of course, for finite-dimensional  $U$ , (A4) holds if  $\phi^{-1}(\{0\}) = \{0\}$  (by the continuity of  $\phi$ ).

*Proof of Theorem 3.6:* Let  $M > 0$ . By statement (a) of Theorem 3.1, there exists  $R > 0$  such that for all  $(x^0, u^0) \in X \times U$  with  $\|x^0\| + \|u^0\| \leq M$ , the solution  $(x(\cdot), u(\cdot))$  of (3.1) satisfies

$$\|x(t)\| + \|u(t)\| \leq R, \quad \forall t \geq 0. \tag{3.39}$$

Since  $\phi \in \mathcal{S}[0, b)$  and by assumption (A3), there exists  $c \in (a, b)$  such that

$$\phi \in \mathcal{S}[0, c] \cap \mathcal{S}_V[a, c].$$

Define  $\psi : U \rightarrow U$  by

$$\psi(v) = \begin{cases} \phi(v) & \text{if } \|v\| \leq R \\ c \left(1 - \frac{R}{\|v\|}\right) v + \phi\left(\frac{R}{\|v\|}v\right) & \text{if } \|v\| > R. \end{cases} \tag{3.40}$$

Clearly,  $\psi$  is locally Lipschitz. Moreover, by Corollary A.2 in Part 1 of the Appendix, there exists  $\varepsilon > 0$  such that  $\psi \in \mathcal{S}[\varepsilon, b)$  (this is evident in the case  $\dim U = 1$ ). Consequently, we may apply Theorem 3.5 to the system

$$\dot{\zeta}(t) = A\zeta(t) + B\psi(\eta(t)), \quad \zeta(0) = \zeta^0, \tag{3.41a}$$

$$\dot{\eta}(t) = -C_L \mathbf{T}_t x^0 - [\mathbf{F}_\infty(\psi(\eta))](t), \quad \eta(0) = \eta^0, \tag{3.41b}$$

to conclude that the zero solution of (3.41) is globally exponentially stable. By (3.39) and (3.40) it is clear that for all initial conditions  $(x^0, u^0) \in X \times U$  with  $\|x^0\| + \|u^0\| \leq M$ , the solution  $(x(\cdot), u(\cdot))$  of (3.1) is also

a solution of (3.41). Therefore, by Theorem 3.5, there exists  $N \geq 1$  and  $\nu \in (\omega(\mathbf{T}), 0)$  such that for all initial conditions  $(x^0, u^0) \in X \times U$  with  $\|x^0\| + \|u^0\| \leq M$ ,

$$\|x(t)\| + \|u(t)\| \leq Ne^{\nu t}(\|x^0\| + \|u^0\|), \quad \forall t \geq 0.$$

□

#### 4. APPLICATIONS TO LOW-GAIN INTEGRAL CONTROL

In this section we apply the results in Section 3 to the so-called low-gain tracking problem described in the Introduction (see also Fig. 2). As in Section 3, let  $\Sigma = (\mathbf{T}, \Phi, \Psi, \mathbf{F})$  be a well-posed linear system with state space  $X$ , input space  $U$ , output space  $Y = U$ , generating operators  $A, B$  and  $C$ , input-output operator  $\mathbf{F}_\infty$  and transfer function  $\mathbf{G}$ . In this section we assume that  $U = Y = \mathbb{R}^m$ .

For  $\lambda > 0$ , let  $\mathcal{N}_1(\lambda)$  denote the set of all nondecreasing globally Lipschitz nonlinearities  $f : \mathbb{R} \rightarrow \mathbb{R}$  such that  $\lambda$  is a Lipschitz constant for  $f$ . Note that if  $f \in \mathcal{N}_1(\lambda)$  and  $f(0) = 0$ , then  $f \in \mathcal{S}[0, \lambda]$ . Moreover, for  $\lambda > 0$ ,  $\mathcal{N}_m(\lambda)$  denotes the set of all nonlinearities  $f : \mathbb{R}^m \rightarrow \mathbb{R}^m$  which are of the form

$$f(v) = [f_1(v_1), f_2(v_2), \dots, f_m(v_m)]^T, \quad \forall v = (v_1, v_2, \dots, v_m)^T \in \mathbb{R}^m, \tag{4.1}$$

where  $f_i \in \mathcal{N}_1(\lambda)$  for all  $i = 1, \dots, m$ . Sometimes it will be convenient to write (4.1) in the form  $f = \text{diag}(f_i)$ . Clearly, a nonlinearity in  $\mathcal{N}_m(\lambda)$  is globally Lipschitz.

Consider the following nonlinear system

$$\dot{x}(t) = Ax(t) + B\phi(u(t)), \quad x(0) = x^0 \in X \tag{4.2a}$$

$$\dot{u}(t) = k\{r - C_L \mathbf{T}_t x^0 - [\mathbf{F}_\infty(\phi(u))](t)\}, \quad u(0) = u^0 \in \mathbb{R}^m, \tag{4.2b}$$

where  $r \in \mathbb{R}^m$  is the reference vector,  $k \in \mathbb{R}$  is a gain parameter and  $\phi : \mathbb{R}^m \rightarrow \mathbb{R}^m$  is a nonlinearity in  $\mathcal{N}_m(\lambda)$ . The aim is to show that under suitable conditions on  $\Sigma$ , the error  $e(t) = r - y(t)$ , where  $y(t) = C_L \mathbf{T}_t x^0 + [\mathbf{F}_\infty(\phi(u))](t)$ , becomes small in some sense as  $t \rightarrow \infty$ .

If  $\mathbf{G}$  is holomorphic and bounded on  $\mathbb{C}_{-\varepsilon}$  for some  $\varepsilon > 0$  (which for example is the case if  $\Sigma$  is exponentially stable) and  $\mathbf{G}(0) = \mathbf{G}^*(0) > 0$ , then it is not difficult to show that the following positive-real condition

$$I + \frac{k}{2} \left( \frac{1}{s} \mathbf{G}(s) + \frac{1}{\bar{s}} \mathbf{G}^*(s) \right) \geq 0, \quad \forall s \in \mathbb{C}_0 \tag{4.3}$$

holds for all sufficiently small  $k > 0$ , see Lemma 3.10 in [21]. We define

$$K := \sup\{k > 0 : (4.3) \text{ holds}\}.$$

Recall that  $\mathcal{M}$  denotes the space of all  $\mathbb{R}^{m \times m}$ -valued Borel measures on  $\mathbb{R}_+$ .

**Theorem 4.1.** *Assume that  $\Sigma$  is exponentially stable and  $\mathbf{G}(0) = \mathbf{G}^*(0) > 0$ . Let  $\lambda > 0$ ,  $\phi \in \mathcal{N}_m(\lambda)$ ,  $k \in (0, K/\lambda)$  and let  $r \in \mathbb{R}^m$  be such that*

$$\phi^r := [\mathbf{G}(0)]^{-1}r \in \text{im } \phi. \tag{4.4}$$

*Then the solution  $(x(\cdot), u(\cdot))$  of (4.2) is unique and exists on  $\mathbb{R}_+$ , and for each  $u^r \in \phi^{-1}(\{\phi^r\})$ , there exists  $N > 0$  such that for all  $(x^0, u^0) \in X \times \mathbb{R}^m$*

$$\|x(t) - x^r\| + \|u(t) - u^r\| \leq N(\|x^0 - x^r\| + \|u^0 - u^r\|), \quad \forall t \geq 0, \tag{4.5}$$

*where  $x^r := -A^{-1}B\phi^r$ . Moreover, the following statements hold:*

- (a)  $\lim_{t \rightarrow \infty} \phi(u(t)) = \phi^r$ ,  $\phi \circ u - \phi^r \in L^2(\mathbb{R}_+, \mathbb{R}^m)$ ;
- (b)  $\lim_{t \rightarrow \infty} \|x(t) - x^r\| = 0$ ,  $x - x^r \in L^2(\mathbb{R}_+, X)$ ;
- (c)  $e := r - y \in L^2(\mathbb{R}_+, \mathbb{R}^m)$ , where  $y(t) = C_L \mathbf{T}_t x^0 + [\mathbf{F}_\infty(\phi(u))](t)$ ;
- (d) under the additional assumption that  $m = 1$ , the limit  $\lim_{t \rightarrow \infty} u(t) =: u^\infty$  exists, is finite and satisfies  $\phi(u^\infty) = \phi^r$ ;
- (e) under the additional assumption that  $\phi^{-1}(\{\phi^r\}) \cap W$  is finite for any bounded set  $W \subset \mathbb{R}^m$ , the limit  $\lim_{t \rightarrow \infty} u(t) =: u^\infty$  exists, is finite and satisfies  $\phi(u^\infty) = \phi^r$ ;
- (f) under the additional assumption that  $\mathfrak{L}^{-1}(\mathbf{G}) \in \mathcal{M}$ , the error  $e$  satisfies  $e = e_1 + e_2$ , where  $e_1$  is a bounded function with  $\lim_{t \rightarrow \infty} e_1(t) = 0$  and  $e_2 \in L^2_\alpha(\mathbb{R}_+, \mathbb{R}^m)$  for any  $\alpha > \omega(\mathbf{T})$ ; if additionally  $\mathbf{T}_{t^0} x^0 \in X_1$  for some  $t^0 \geq 0$ , then  $\lim_{t \rightarrow \infty} e_2(t) = 0$ .

**Remark 4.2.** (a) Whilst statement (c) of Theorem 4.1 need not imply asymptotic tracking, it does imply that the error is small for large  $t$  in the sense that for all  $\delta, \varepsilon > 0$ , there exists  $\tau > 0$  such that

$$\mu_L(\{t \geq \tau : \|e(t)\| \geq \delta\}) \leq \varepsilon,$$

where  $\mu_L$  denotes the Lebesgue measure on  $\mathbb{R}_+$ .

(b) The assumption in statement (f) of Theorem 4.1 that  $\mathfrak{L}^{-1}(\mathbf{G}) \in \mathcal{M}$  implies the regularity of  $\Sigma$ . However, this assumption is not very restrictive in the sense that it seems to be satisfied in all practical examples of exponentially stable well-posed systems. In particular, it is satisfied if  $B$  or  $C$  is bounded (see Lem. 2.3 in [18]). Statement (f) implies that  $\lim_{t \rightarrow \infty} e(t) = 0$ , provided that  $\mathfrak{L}^{-1}(\mathbf{G}) \in \mathcal{M}$  and  $\mathbf{T}_{t^0} x^0 \in X_1$  for some  $t^0 \geq 0$ .

(c) In applying Theorem 4.1 it is important to know the constant  $K$  or at least a lower bound for  $K$ . In the single-input, single-output case it has been shown in [19] how  $K$  can be obtained from frequency-response experiments performed on the linear part of the plant.

(d) In the multivariable case, the applicability of Theorem 4.1 is severely limited by the assumption  $\mathbf{G}(0) = \mathbf{G}^*(0) > 0$ . If we relax this hypothesis on  $\mathbf{G}(0)$  and only assume that  $\det \mathbf{G}(0) \neq 0$ , then there exists  $\Gamma \in \mathbb{R}^{m \times m}$  such that  $\Gamma \mathbf{G}(0) = \mathbf{G}^*(0) \Gamma^* > 0$  (choose, for example,  $\Gamma = [\mathbf{G}(0)]^{-1}$ ). If the control law (4.2b) is replaced by

$$\dot{u}(t) = k\Gamma\{r - C_L \mathbf{T}_t x^0 - [\mathbf{F}_\infty(\phi(u))](t)\}$$

and  $\mathbf{G}(s)$  is replaced by  $\Gamma \mathbf{G}(s)$  in (4.3), then the conclusions of Theorem 4.1 remain true. However, finding a suitable “matrix gain”  $\Gamma$  will usually require exact knowledge of  $\mathbf{G}(0)$ .

(e) We remark that Theorem 4.1 considerably improves the main result of [20] (see Th. 3.3 in [20]) in the sense that Theorem 4.1 (i) guarantees better asymptotic and faster convergence properties and (ii) is not restricted to single-input single-output regular systems, but applies to the wider class of multivariable well-posed systems. In particular, the following parts of Theorem 4.1 are new: the stability property (4.5), the fact that  $\phi \circ u - \phi^r \in L^2(\mathbb{R}_+, \mathbb{R}^m)$  and  $x - x^r \in L^2(\mathbb{R}_+, X)$  and statements (c)–(e).  $\diamond$

*Proof of Theorem 4.1:* Let  $(x^0, u^0) \in X \times U$ . By Lemma 2.4, the corresponding solution of the initial-value problem (4.2), denoted by  $(x(\cdot), u(\cdot))$ , is unique and, since  $\phi$  is globally Lipschitz, it exists on  $\mathbb{R}_+$ . Let  $u^r \in \phi^{-1}(\{\phi^r\})$  and introduce the nonlinearity

$$\psi : \mathbb{R}^m \rightarrow \mathbb{R}^m, \quad w \mapsto \phi(w + u^r) - \phi^r. \quad (4.6)$$

Since  $\phi \in \mathcal{N}_m(\lambda)$ , it is straightforward to show that  $\psi \in \mathcal{S}[0, \lambda]$ . Set

$$z(\cdot) := x(\cdot) - x^r, \quad v(\cdot) := u(\cdot) - u^r. \quad (4.7)$$

We proceed in two steps.

**Step 1:** We claim that

$$\dot{z}(t) = Az(t) + B\psi(v(t)), \quad z(0) = z^0 := x^0 - x^r \in X, \tag{4.8a}$$

$$\dot{v}(t) = -k\{C_L \mathbf{T}_t z^0 + [\mathbf{F}_\infty(\psi(v))](t)\}, \quad v(0) = v^0 := u^0 - u^r \in U, \tag{4.8b}$$

where, as usual, the derivative on the left-hand side of (4.8a) has to be interpreted in  $X_{-1}$ . Equation (4.8a) follows easily from (4.2a). Moreover, setting

$$\tilde{v}(t) := r - C_L \mathbf{T}_t x^r - [\mathbf{F}_\infty(\phi^r)](t),$$

we obtain from (4.2b) that

$$\dot{v}(t) = k\{\tilde{v}(t) - C_L \mathbf{T}_t z^0 - [\mathbf{F}_\infty(\psi(v))](t)\}.$$

It remains to show that  $\tilde{v}(t) = 0$  for a.e.  $t \geq 0$ . Using Laplace transforms and (2.9), we obtain

$$\begin{aligned} (\mathcal{L}(\tilde{v}))(s) &= \frac{r}{s} - C(sI - A)^{-1}x^r - \frac{1}{s}\mathbf{G}(s)\phi^r \\ &= -\frac{1}{s}(\mathbf{G}(s) - \mathbf{G}(0))\phi^r + C(sI - A)^{-1}A^{-1}B\phi^r = 0, \end{aligned}$$

showing that  $\tilde{v}(t) = 0$  for a.e.  $t \geq 0$ .

**Step 2:** For  $k \in (0, K/\lambda)$ , we may apply Theorem 3.1 to (4.8) in order to derive (4.5) and

$$\lim_{t \rightarrow \infty} \|z(t)\| = 0, \quad z \in L^2(\mathbb{R}_+, X), \quad \lim_{t \rightarrow \infty} \psi(v(t)) = 0, \quad \psi \circ v \in L^2(\mathbb{R}_+, \mathbb{R}^m). \tag{4.9}$$

Statements (a) and (b) now follow from (4.9). Furthermore, using that  $\phi^{-1}(\{\phi^r\}) = \psi^{-1}(\{0\}) + u^r$ , statements (d) and (e) are easy consequences of Theorem 3.1, Corollary 3.3 and Remark 3.4. Statement (c) follows from Lemma 2.1, the exponential stability of  $\Sigma$  and statement (a). To prove statement (f), decompose  $e = e_1 + e_2$ , where

$$e_1(t) := r - [\mathcal{L}^{-1}(\mathbf{G}) \star \phi(u)](t), \quad e_2(t) := -C_L \mathbf{T}_t x^0. \tag{4.10}$$

Clearly, using the exponential stability of  $\mathbf{T}$ ,  $e_2 \in L^2_\alpha(\mathbb{R}_+, \mathbb{R}^m)$  for any  $\alpha > \omega(\mathbf{T})$  and  $\lim_{t \rightarrow \infty} e_2(t) = 0$  if  $\mathbf{T}_{t^0} x^0 \in X_1$  for some  $t^0 \geq 0$ . Finally, since  $\lim_{t \rightarrow \infty} \phi(u(t)) = \phi^r$  and  $\mathcal{L}^{-1}(\mathbf{G}) \in \mathcal{M}$ , it follows from Gripenberg *et al.* [11] (Th. 6.1, Part (ii), p. 96) that

$$\lim_{t \rightarrow \infty} e_1(t) = r - \mathbf{G}(0)\phi^r = r - r = 0.$$

□

**Remark 4.3.** Suppose that  $\phi = \text{diag}(\phi_i)$ , where the functions  $\phi_i : \mathbb{R} \rightarrow \mathbb{R}$  are non-decreasing. If we replace the global Lipschitz assumption on  $\phi_i$  by the weaker assumption that  $\phi_i$  is locally Lipschitz and  $\phi_i(\cdot) - \phi_i(0) \in \mathcal{S}[0, b]$  for some  $b \geq 0$ , then it is not difficult to prove that the function  $\psi$  defined in (4.6) is in  $\mathcal{S}[0, \tilde{b}]$  for some  $\tilde{b} \geq 0$ . An inspection of the proof of Theorem 4.1 then shows that the conclusions of Theorem 4.1 remain true for all sufficiently small  $k > 0$ . ◇

Under certain additional assumptions on  $\phi$  and  $r$ , it can be shown that the variables  $x$ ,  $u$  and  $y$  converge exponentially fast. This will be addressed in the next result, Theorem 4.5. In order to state and prove this theorem, we need some preparation.

Let  $f \in \mathcal{N}_1(\lambda)$ . The Clarke [5, 6] *generalized directional derivative*  $f^\circ(v; w)$  of  $f$  at  $v$  in direction  $w$  is given by

$$f^\circ(v; w) = \limsup_{\substack{\xi \rightarrow v \\ h \downarrow 0}} \frac{f(\xi + hw) - f(\xi)}{h}.$$

Define  $f^-(\cdot) := -f^\circ(\cdot; -1)$  (if  $f$  is  $C^1$  with derivative  $f'$ , then  $f^- \equiv f'$ ). A point  $v \in \mathbb{R}$  is said to be a *critical point* (and  $f(v)$  is said to be a *critical value*) of  $f$  if  $f^-(v) = 0$ . A point  $v = (v_1, \dots, v_m)^T \in \mathbb{R}^m$  is called a *critical point* (and  $f(v)$  is said to be a *critical value*) of  $f = \text{diag}(f_i) \in \mathcal{N}_m(\lambda)$  if there exists  $j \in \{1, \dots, m\}$  such that  $v_j$  is a critical point of  $f_j$ . Note that if  $f \in \mathcal{N}_m(\lambda)$  and  $w \in \text{im } f$  is not a critical value of  $f$ , then  $f^{-1}(\{w\})$  is a singleton.

We record the following technicality for later use. The proof can be found in the Appendix, Part 2.

**Lemma 4.4.** *Let  $\lambda > 0$  and  $f \in \mathcal{N}_m(\lambda)$ . If  $f(0) = 0$  and  $0$  is not a critical point of  $f$ , then there exist  $a \in (0, \lambda)$  and an open set  $V \subset \mathbb{R}^m$  with  $0 \in V$  such that  $f \in \mathcal{S}_V[a, \lambda]$ .*

Recall that by definition a  $\mathbb{R}^{m \times m}$ -valued Borel measure  $\mu$  on  $\mathbb{R}_+$  is in  $\mathcal{M}_\alpha$  (where  $\alpha \in \mathbb{R}$ ) if the exponentially weighted measure  $E \mapsto \int_E e^{-\alpha t} \mu(dt)$  belongs to  $\mathcal{M}$ . Equivalently,  $\mathcal{M}_\alpha$  is the space of all  $\mathbb{R}^{m \times m}$ -valued Borel measures  $\mu$  on  $\mathbb{R}_+$  such that  $\int_0^\infty e^{-\alpha t} |\mu|(dt) < \infty$ , where  $|\mu|$  denotes the total variation of  $\mu$ .

**Theorem 4.5.** *Assume that  $\Sigma$  is exponentially stable and  $\mathbf{G}(0) = \mathbf{G}^*(0) > 0$ . Let  $\lambda > 0$ ,  $\phi \in \mathcal{N}_m(\lambda)$  and  $k \in (0, K/\lambda)$ . Let  $r \in \mathbb{R}^m$  be such that*

$$\phi^r := [\mathbf{G}(0)]^{-1} r \in \text{im } \phi$$

and  $\phi^r$  is not a critical value of  $\phi$ . Let  $u^r$  be the unique element in  $\mathbb{R}^m$  such that  $\phi(u^r) = \phi^r$  and set  $x^r := -A^{-1}B\phi^r$ . Then, for given  $M > 0$ , there exist  $N \geq 1$  and  $\nu \in (\omega(\mathbf{T}), 0)$  such that for all  $(x^0, u^0) \in X \times \mathbb{R}^m$  with  $\|x^0 - x^r\| + \|u^0 - u^r\| \leq M$ , the solution  $(x(\cdot), u(\cdot))$  of (4.2) satisfies

$$\|x(t) - x^r\| + \|u(t) - u^r\| \leq N e^{\nu t} (\|x^0 - x^r\| + \|u^0 - u^r\|), \quad \forall t \geq 0, \quad (4.11)$$

and

$$\|\phi(u(t)) - \phi^r\| \leq \lambda N e^{\nu t} (\|x^0 - x^r\| + \|u^0 - u^r\|), \quad \forall t \geq 0. \quad (4.12)$$

Moreover, for all  $(x^0, u^0) \in X \times \mathbb{R}^m$  with  $\|x^0 - x^r\| + \|u^0 - u^r\| \leq M$ , the following statements hold:

- (a) for any  $\alpha > \nu$ ,  $e := r - y \in L_\alpha^2(\mathbb{R}_+, \mathbb{R}^m)$ , where  $y(t) = C_L \mathbf{T}_t x^0 + [\mathbf{F}_\infty(\phi(u))](t)$ ;
- (b) under the additional assumption that  $\mathfrak{L}^{-1}(\mathbf{G}) \in \mathcal{M}_\alpha$  for some  $\alpha < 0$ , the error  $e$  satisfies  $e = e_1 + e_2$ , where  $e_1 \in L_\beta^\infty(\mathbb{R}_+, \mathbb{R}^m)$  for any  $\beta \geq \max(\alpha, \nu)$ , and  $e_2 \in L_\beta^2(\mathbb{R}_+, \mathbb{R}^m)$  for any  $\beta > \omega(\mathbf{T})$ ; if additionally  $\mathbf{T}_{t^0} x^0 \in X_1$  for some  $t^0 \geq 0$ , then  $e_2 \in L_\beta^\infty(\mathbb{R}_+, \mathbb{R}^m)$  for any  $\beta > \omega(\mathbf{T})$ .

**Remark 4.6.** (a) Statement (b) shows that exponentially fast asymptotic tracking is guaranteed if  $\mathfrak{L}^{-1}(\mathbf{G}) \in \mathcal{M}_\alpha$  for some  $\alpha < 0$  and  $\mathbf{T}_{t^0} x^0 \in X_1$  for some  $t^0 \geq 0$ . Again, the assumption that  $\mathfrak{L}^{-1}(\mathbf{G}) \in \mathcal{M}_\alpha$  for some  $\alpha < 0$  is not very restrictive and seems to be satisfied in all practical examples of exponentially stable well-posed systems. In particular, this assumption is satisfied if  $B$  or  $C$  is bounded (see Lem. 2.3 in [18]).

(b) We mention that Parts (c) and (d) of Remark 4.2 and Remark 4.3 remain relevant in the context of Theorem 4.5.

(c) As compared to the main result in [20] (see Th. 3.3 in [20]), Theorem 4.5 is entirely new: the issue of exponential decay is not addressed in [20].  $\diamond$

*Proof of Theorem 4.5:* Let  $(x^0, u^0) \in X \times U$ . By Lemma 2.4, the corresponding solution of the initial-value problem (4.2), denoted by  $(x(\cdot), u(\cdot))$ , is unique and exists on  $\mathbb{R}_+$ . Let  $\psi, z$  and  $v$  be defined by (4.6) and (4.7). Clearly, by the assumptions on  $\phi$ ,  $\psi \in \mathcal{N}_m(\lambda)$ ,  $\psi^{-1}(\{0\}) = \{0\}$  and  $0$  is not a critical value of  $\psi$ . Invoking Lemma 4.4, we see that there exists  $a \in (0, \lambda)$  and an open set  $V \subset \mathbb{R}^m$  with  $0 \in V$  such that  $\psi \in \mathcal{S}_V[a, \lambda]$ . For  $k \in (0, K/\lambda)$  we may apply Theorem 3.6 to (4.8) in order to derive (4.11) and (4.12). Statement (a) follows

from Lemma 2.1 and (4.12). In order to prove statement (b), we write  $e = e_1 + e_2$ , with  $e_1$  and  $e_2$  defined by (4.10). The claim for  $e_2$  follows immediately from standard results on admissible observation operators. Finally, to prove exponential convergence of  $e_1$ , set  $\mu := \mathfrak{L}^{-1}(\mathbf{G})$ . By assumption  $\mu \in \mathcal{M}_\alpha$  for some  $\alpha < 0$ . The function  $t \mapsto \|e_1(t)\|$  can be estimated as follows

$$\|e_1(t)\| \leq \|[\mu \star (\phi(u) - \phi^r \theta)](t)\| + \|(\mu \star \phi^r \theta)(t) - \mathbf{G}(0)\phi^r\|, \quad \forall t \geq 0, \tag{4.13}$$

where  $\theta$  denotes the unit-step (Heaviside) function. Let  $\beta \geq \max(\alpha, \nu)$ . Then, by (4.12), the function  $t \mapsto e^{-\beta t} \|\phi(u(t)) - \phi^r\|$  remains bounded as  $t \rightarrow \infty$ . Since  $\mu \in \mathcal{M}_\alpha$ , the measure  $E \mapsto \int_E e^{-\alpha t} \mu(dt)$  belongs to  $\mathcal{M}$ . Hence, by [11] (Th. 3.5, Part (i), p. 119), we may conclude that there exists  $M_1 > 0$  such that

$$e^{-\beta t} \|[\mu \star (\phi(u) - \phi^r \theta)](t)\| \leq M_1, \quad \forall t \geq 0. \tag{4.14}$$

Moreover,  $M_2 := \int_0^\infty e^{-\alpha t} |\mu|(dt) < \infty$ , and thus

$$e^{-\beta t} \|(\mu \star \phi^r \theta)(t) - \mathbf{G}(0)\phi^r\| \leq \|\phi^r\| e^{-\alpha t} \int_t^\infty |\mu|(d\tau) \leq \|\phi^r\| \int_0^\infty e^{-\alpha \tau} |\mu|(d\tau) = M_2 \|\phi^r\|. \tag{4.15}$$

Consequently, appealing to (4.13–4.15), we deduce that the function  $\mathbb{R}_+ \rightarrow \mathbb{R}$ ,  $t \mapsto e^{-\beta t} \|e_1(t)\|$  is bounded.  $\square$

### 5. EXAMPLE: DIFFUSION PROCESS WITH OUTPUT DELAY

Consider a diffusion process (with diffusion coefficient  $\kappa > 0$  and with Dirichlet boundary conditions), on the one-dimensional spatial domain  $I = (0, 1)$ , with scalar nonlinear pointwise control action (applied at point  $x_b \in I$ , via a nonlinearity  $\phi$  with Lipschitz constant  $\lambda > 0$ ) and delayed (delay  $h \geq 0$ ) pointwise scalar observation (at point  $x_c \in I$ ,  $x_c > x_b$ ). We formally write this diffusion process as

$$\begin{aligned} z_t(t, x) &= \kappa z_{xx}(t, x) + \delta(x - x_b)\phi(u(t)), & y(t) &= z(t - h, x_c) \\ z(t, 0) &= 0 = z(t, 1), & & \text{for all } t > 0. \end{aligned}$$

For simplicity, we assume zero initial conditions:

$$z(t, x) = 0, \quad \text{for all } (t, x) \in [-h, 0] \times [0, 1].$$

This system was analyzed in the context of low-gain integral control in [19, 20]. With input  $\phi(u(\cdot))$  and output  $y(\cdot)$ , this example qualifies as a well-posed linear system with transfer function given by

$$\mathbf{G}(s) = \frac{e^{-sh} \sinh\left(x_b \sqrt{(s/\kappa)}\right) \sinh\left((1 - x_c)\sqrt{(s/\kappa)}\right)}{\kappa \sqrt{(s/\kappa)} \sinh \sqrt{(s/\kappa)}}.$$

It is not difficult to show that  $\mathfrak{L}^{-1}(\mathbf{G}) \in L^1_\alpha(\mathbb{R}_+, \mathbb{R}) \subset \mathcal{M}_\alpha$  for any  $\alpha > -\kappa\pi^2$ .

From [19] we know that

$$K = \sup\{k > 0 \mid (4.3) \text{ holds}\} = \frac{1}{|\mathbf{G}'(0)|} = \frac{6\kappa^2}{x_b(1 - x_c)(6h\kappa + 1 - x_b^2 - (1 - x_c)^2)}.$$

Note the dependence of  $K$  on the time-delay  $h$ : the larger  $h$ , the smaller  $K$ . By Theorem 4.5, Part (b), for each  $k \in (0, K/\lambda)$ , the integral control

$$u(t) = k \int_0^t [r - y(t)] dt$$

guarantees exponentially fast asymptotic tracking of every constant reference value  $r$  such that

$$\phi^r = \frac{r}{\mathbf{G}(0)} = \frac{\kappa r}{x_b(1-x_c)} \in \text{im } \phi$$

and  $\phi^r$  is not a critical value of  $\phi$ . Note that  $\phi^r$  does not depend on  $h$ . It is easy to see that if  $0 \in \text{im } \phi$ , then the range of values of  $r$  which can be tracked becomes maximal if  $x_c \downarrow x_b = 1/2$ .

For purposes of illustration, we adopt the following values

$$\kappa = 0.1, \quad x_b = \frac{1}{3}, \quad x_c = \frac{2}{3}, \quad h = 1$$

and we consider a nonlinearity  $\phi$  of saturation type, defined as follows

$$u \mapsto \phi(u) := \begin{cases} 1, & u \geq 1 \\ u, & u \in (0, 1) \\ 0, & u \leq 0. \end{cases}$$

In this case,  $K = 243/620 \approx 0.3919$  and  $\lambda = 1$ . The critical values of  $\phi$  are 0 and 1. For  $r = 1$ , we have

$$\phi^r = \frac{r}{\mathbf{G}(0)} = \frac{\kappa}{x_b(1-x_c)} = 0.9 \in [0, 1] = \text{im } \phi.$$

In particular,  $\phi^r$  is not a critical value of  $\phi$ . In each of the following three cases of controller gains

$$(i) \ k = 0.39, \quad (ii) \ k = 0.26, \quad (iii) \ k = 0.13,$$

Figure 4 depicts the output behaviour of the system under integral control, while Figures 5 and 6 depict the corresponding control input and integrator state, respectively. Figure 7 illustrates the evolution of the temperature profile  $z(t, \cdot)$  in case (i). These figures were generated using SIMULINK Simulation Software within MATLAB, wherein a truncated eigenfunction expansion, of order 20, was adopted to model the diffusion process.

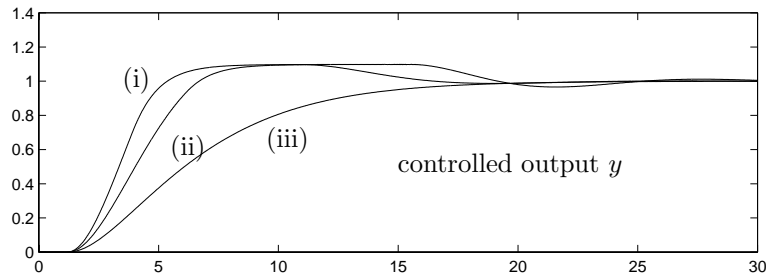


Figure 4: Controlled output.



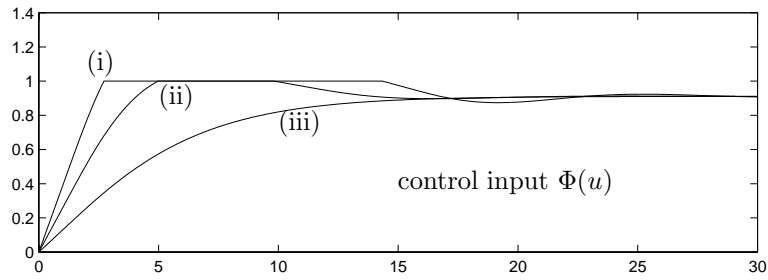


Figure 5: Control input.

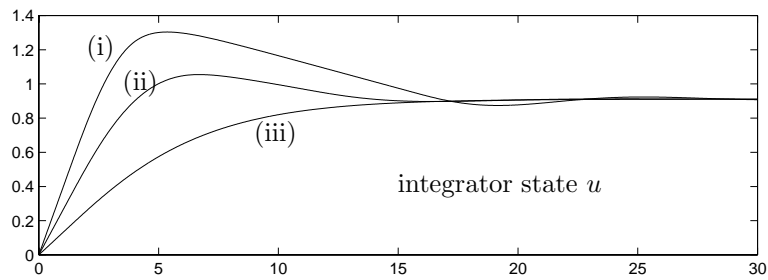


Figure 6: Integrator state.

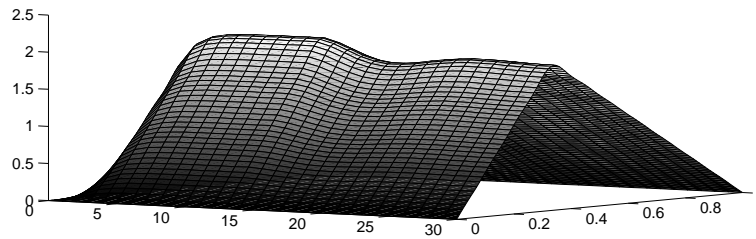


Figure 7: Temperature profile in case (i) ( $k = 0.39$ ).

## 6. CONCLUSIONS

In this paper we have proved a number of absolute stability results for well-posed infinite-dimensional systems which guarantee, depending on the assumptions imposed on the nonlinearity, stability in the large, semi-global exponential stability or global exponential stability. These results are certainly new in the context of infinite-dimensional systems, but might also exhibit some novelty in the finite-dimensional case: the authors were unable to find finite-dimensional versions of the main results in Section 3 in the literature. Our approach is based on a particular coordinate transformation combined with a Lyapunov-type analysis of the transformed system in which the positive-real Riccati equation theory for Pritchard-Salamon systems given in [16] plays an important role. In Section 4 the absolute stability results were applied to the low-gain integral control problem resulting in substantial improvements of the main result in [20]. An interesting problem for future research is the question whether the absolute stability results in Section 3 remain true if we replace the positive-real condition (PR) by

the less restrictive assumption that there exists  $q \geq 0$  such that

$$\frac{2}{b}I + q(\mathbf{G}(s) + \mathbf{G}^*(s)) + \left(\frac{1}{s}\mathbf{G}(s) + \frac{1}{\bar{s}}\mathbf{G}^*(s)\right) \geq 0, \quad \forall s \in \mathbb{C}_0.$$

This seems to be a difficult and challenging problem: in particular, a Lyapunov stability analysis based on the above positive-real condition (for  $q > 0$ ) would involve considerably more unboundedness than the Lyapunov analysis for the case  $q = 0$  given in Section 3.

### APPENDIX

#### Part 1

In this part of the Appendix we prove that there exists  $\varepsilon > 0$  such that the function  $\psi : U \rightarrow U$  as defined in (3.40) is in  $\mathcal{S}[\varepsilon, b]$ , provided that  $\phi \in \mathcal{S}[0, b]$  and  $\phi$  satisfies assumptions (A3) and (A4) of Theorem 3.6. To this end we recall some properties of sector bounded nonlinearities which will be used freely in the following.

Let  $W \subset U$  and  $a \leq b$ . For any function  $f : U \rightarrow U$  we have

$$f \in \mathcal{S}_W[a, b] \iff \left\| f(w) - \frac{a+b}{2}w \right\| \leq \frac{b-a}{2}\|w\|, \quad \forall w \in W. \tag{A.1}$$

From this it follows that if  $f \in \mathcal{S}_W[a, b]$ , then  $f \in \mathcal{S}_W[c, d]$  for all numbers  $c$  and  $d$  with  $c \leq a \leq b \leq d$ .

**Lemma A.1.** *Let  $f : U \rightarrow U$  be a function. Suppose that  $f \in \mathcal{S}[0, b]$  for some  $b > 0$  and that*

- (a) *there exists a neighbourhood  $V \subset U$  of 0 and a number  $a \in (0, b)$  such that  $f \in \mathcal{S}_V[a, b]$ ;*
- (b)  *$\inf_{w \in W} \|f(w)\| > 0$  for any bounded closed nonempty set  $W \subset U$  with  $0 \notin W$ .*

*Under these conditions, for any bounded nonempty set  $Y \subset U$ , there exists  $\varepsilon > 0$  such that  $f \in \mathcal{S}_Y[\varepsilon, b]$ .*

Of course, Lemma A.1 is not surprising and, if  $\dim U = 1$ , the result is obvious and trivial. However, the case  $\dim U > 1$  requires a proof.

*Proof of Lemma A.1:* Let  $Y \subset U$  be bounded and nonempty. Since  $f \in \mathcal{S}[0, b]$  and by assumption (a), there exists  $c \in (a, b)$  such that  $f \in \mathcal{S}[0, c] \cap \mathcal{S}_V[a, c]$ . Let  $\eta > 0$  be such that for all  $v \in U$

$$\|v\| < \eta \implies v \in V. \tag{A.2}$$

Let  $d \in (c, b)$ . We claim that there exists  $\varepsilon > 0$  such that  $f \in \mathcal{S}_Y[\varepsilon, d] \subset \mathcal{S}_Y[\varepsilon, b]$ . Seeking a contradiction, suppose that the claim is not true. Then there exist sequences  $(\varepsilon_n) \subset (0, a)$  with  $\lim_{n \rightarrow \infty} \varepsilon_n = 0$  and  $(v_n) \subset Y$  such that

$$\langle f(v_n) - \varepsilon_n v_n, f(v_n) - d v_n \rangle > 0, \quad \forall n \in \mathbb{N}. \tag{A.3}$$

Since  $f \in \mathcal{S}_V[a, c] \subset \mathcal{S}_V[\varepsilon_n, d]$ , we obtain from (A.2) and (A.3) that

$$\|v_n\| \geq \eta > 0, \quad \forall n \in \mathbb{N}. \tag{A.4}$$

By (A.3),

$$\|f(v_n)\|^2 \geq (d + \varepsilon_n)\langle f(v_n), v_n \rangle - d\varepsilon_n\|v_n\|^2, \quad \forall n \in \mathbb{N}. \tag{A.5}$$

Moreover, since  $f \in \mathcal{S}[0, c]$

$$\|f(v_n)\|^2 \leq c\langle f(v_n), v_n \rangle, \quad \forall n \in \mathbb{N}. \tag{A.6}$$

The set

$$W := \text{clos}\{v_n : n \in \mathbb{N}\}$$

is a bounded closed set, and, by (A.4),  $0 \notin W$ . By assumption (b), there exists  $\nu_1 > 0$  such that

$$\|f(v_n)\|^2 \geq \nu_1, \quad \forall n \in \mathbb{N}. \tag{A.7}$$

Setting  $\nu_2 := \sup_{n \in \mathbb{N}} \|v_n\|^2 < \infty$ , it follows from (A.5–A.7) that

$$c \geq d + \varepsilon_n - \varepsilon_n c d \frac{\nu_2}{\nu_1}, \quad \forall n \in \mathbb{N}.$$

Since  $\lim_{n \rightarrow \infty} \varepsilon_n = 0$ , this implies  $c \geq d$ , in contradiction to  $d \in (c, b)$ . □

**Corollary A.2.** *Suppose that  $\phi \in \mathcal{S}[0, b)$  satisfies the assumptions (A3) and (A4) in Theorem 3.6 and let  $R > 0$ . Then there exists an open neighbourhood  $V \subset U$  of 0, a number  $c \in (a, b)$  and  $\varepsilon > 0$  such that  $\phi \in \mathcal{S}[0, c] \cap \mathcal{S}_V[a, c]$  and the function  $\psi : U \rightarrow U$  defined by*

$$\psi(v) = \begin{cases} \phi(v) & \text{if } \|v\| \leq R \\ c \left(1 - \frac{R}{\|v\|}\right) v + \phi\left(\frac{R}{\|v\|}v\right) & \text{if } \|v\| > R \end{cases}$$

is in  $\mathcal{S}[\varepsilon, b)$ .

*Proof:* Since  $\phi \in \mathcal{S}[0, b)$  and since  $\phi$  satisfies assumption (A3), it is clear that there exist an open neighbourhood  $V \subset U$  of 0 and a number  $c \in (a, b)$  such that  $\phi \in \mathcal{S}[0, c] \cap \mathcal{S}_V[a, c]$ .

Let  $d \in (c, b)$  such that  $2c - d > 0$  and let  $\delta \in (0, 2c - d)$ . Setting

$$b(v) := \phi\left(\frac{R}{\|v\|}v\right) - \frac{cR}{\|v\|}v,$$

we have for  $v \in U$  with  $\|v\| > R$ ,

$$\left\| \psi(v) - \frac{d + \delta}{2}v \right\| \leq \frac{2c - d - \delta}{2}\|v\| + \|b(v)\| = \frac{d - \delta}{2}\|v\| + (c - d)\|v\| + \|b(v)\|. \tag{A.8}$$

Now  $b : U \setminus \{0\} \rightarrow U$  is a bounded function, and so there exists  $\tilde{R} > R$  such that

$$\|b(v)\| \leq (d - c)\|v\|, \quad \forall v \in E_{\tilde{R}},$$

where  $E_{\tilde{R}} := \{v \in U : \|v\| \geq \tilde{R}\}$ . Combining this with (A.8) and applying (A.1) yields

$$\psi \in \mathcal{S}_{E_{\tilde{R}}}[\delta, d] \subset \mathcal{S}_{E_{\tilde{R}}}[\delta, b).$$

To prove the claim, it remains to show that there exists  $\varepsilon \in (0, \delta)$  such that

$$\psi \in \mathcal{S}_{B_{\tilde{R}}}[\varepsilon, b),$$

where  $B_{\tilde{R}} := \{v \in U : \|v\| < \tilde{R}\}$ . This in turn will follow from Lemma A.1 if we can prove that  $\psi \in \mathcal{S}[0, b)$  and  $\psi$  satisfies assumptions (a) and (b) of Lemma A.1. To this end we proceed in three steps.

**Step 1:** We show that  $\psi \in \mathcal{S}[0, b)$ . Using the fact that  $\phi \in \mathcal{S}[0, c]$ , we obtain that for all  $v \in U$  with  $\|v\| > R$

$$\left\| \psi(v) - \frac{c}{2}v \right\| = \left\| \frac{c}{2} \left(1 - \frac{R}{\|v\|}\right) v + \phi\left(\frac{R}{\|v\|}v\right) - \frac{cR}{2\|v\|}v \right\| \leq \frac{c}{2} \left(1 - \frac{R}{\|v\|}\right) \|v\| + \frac{c}{2}R = \frac{c}{2}\|v\|. \tag{A.9}$$

Since  $\psi(v) = \phi(v)$  for all  $v \in U$  with  $\|v\| \leq R$  and  $\phi \in \mathcal{S}[0, c]$ , it follows from (A.1) and (A.9) that  $\psi \in \mathcal{S}[0, c] \subset \mathcal{S}[0, b]$ .

**Step 2:** Clearly, the set  $V_R = \{v \in V : \|v\| < R\}$  is an open neighbourhood of 0, and by construction

$$\psi \in \mathcal{S}_{V_R}[a, b],$$

showing that  $\psi$  satisfies assumption (a) of Lemma A.1.

**Step 3:** To prove that  $\psi$  satisfies assumption (b) of Lemma A.1, let  $W \subset U$  be nonempty, bounded and closed with  $0 \notin W$ . Define  $W_R := \{w \in W : \|w\| \leq R\}$ . Then  $W_R$  is bounded and closed, and, if  $W_R \neq \emptyset$ , we obtain using assumption (A4) that

$$\inf_{w \in W_R} \|\psi(w)\| = \inf_{w \in W_R} \|\phi(w)\| > 0. \quad (\text{A.10})$$

Furthermore, for all  $w \in U$  with  $\|w\| \geq R$

$$\|\psi(w)\| \geq c \left(1 - \frac{R}{2\|w\|}\right) \|w\| - \left\| \phi \left( \frac{R}{\|w\|} w \right) - \frac{cR}{2\|w\|} w \right\| \geq c \left(1 - \frac{R}{2\|w\|}\right) \|w\| - \frac{c}{2} R = c(\|w\| - R),$$

where in the second inequality we have used that  $\phi \in \mathcal{S}[0, c]$ . We see that for any  $\eta > 0$

$$\inf_{\|w\| \geq R+\eta} \|\psi(w)\| > 0. \quad (\text{A.11})$$

Finally, for  $\eta > 0$ , define

$$B(R, \eta) := \{w \in U : R \leq \|w\| \leq R + \eta\}.$$

By assumption (A4),  $\inf_{\|v\|=R} \|\phi(v)\| > 0$ , and hence it follows that there exist  $\gamma > 0$  and  $\eta^* > 0$  such that for all  $\eta \in (0, \eta^*)$

$$\inf_{w \in B(R, \eta)} \left\| \phi \left( \frac{R}{\|w\|} w \right) \right\| \geq \sup_{w \in B(R, \eta)} \left( c \left(1 - \frac{R}{\|w\|}\right) \|w\| \right) + \gamma. \quad (\text{A.12})$$

Therefore, since for all  $w \in U$  with  $\|w\| \geq R$

$$\psi(w) = \phi \left( \frac{R}{\|w\|} w \right) + c \left(1 - \frac{R}{\|w\|}\right) w,$$

we may conclude using (A.12) that

$$\inf_{w \in B(R, \eta)} \|\psi(w)\| \geq \gamma > 0, \quad \forall \eta \in (0, \eta^*).$$

Together with (A.10) and (A.11) this leads to

$$\inf_{w \in W} \|\psi(w)\| > 0,$$

showing that  $\psi$  satisfies assumption (b) of Lemma A.1. □

## Part 2

This part of the Appendix contains a proof of Lemma 4.4. We prove the following result of which Lemma 4.4 is an easy consequence.

**Lemma A.3.** *Let  $b > 0$  and  $f \in \mathcal{N}_1(b)$ . If  $f(0) = 0$  and  $f^-(0) > 0$ , then there exist constants  $\varepsilon > 0$  and  $a \in (0, b)$  such that*

$$av^2 \leq f(v)v \leq bv^2, \quad \forall v \in (-\varepsilon, \varepsilon),$$

*i.e.,  $f \in \mathcal{S}_{(-\varepsilon, \varepsilon)}[a, b]$ .*

*Proof:* Since  $f \in \mathcal{N}_1(b)$  and  $f(0) = 0$  it follows easily that

$$f(v)v \leq bv^2, \quad \forall v \in \mathbb{R}.$$

It remains to show that there exists  $a \in (0, b)$  and  $\varepsilon > 0$  such that

$$av^2 \leq f(v)v, \quad \forall v \in (-\varepsilon, \varepsilon). \quad (\text{A.13})$$

Seeking a contradiction suppose that (A.13) is not true. Then there exist sequences  $(v_n) \subset \mathbb{R} \setminus \{0\}$  and  $(a_n) \subset (0, b)$  with  $\lim_{n \rightarrow \infty} v_n = 0$  and  $\lim_{n \rightarrow \infty} a_n = 0$  and such that

$$a_n v_n^2 > f(v_n)v_n.$$

Clearly,  $(v_n)$  must contain a subsequence  $(v_{n_j})$  with either  $v_{n_j} > 0$  for all  $j \in \mathbb{N}$  (Case 1) or  $v_{n_j} < 0$  for all  $j \in \mathbb{N}$  (Case 2).

**Case 1:** Setting  $\xi_j = h_j = v_{n_j}$ , it follows that

$$\frac{f(\xi_j - h_j) - f(\xi_j)}{h_j} = \frac{f(0) - f(\xi_j)}{\xi_j} = -\frac{f(\xi_j)}{\xi_j} > -a_{n_j}.$$

This yields  $f^\circ(0; -1) \geq 0$ , and hence,  $f^-(0) \leq 0$ , contradicting the hypothesis that  $f^-(0) > 0$ .

**Case 2:** Setting  $\xi_j = 0$  and  $h_j = -v_{n_j}$ , we have

$$\frac{f(\xi_j - h_j) - f(\xi_j)}{h_j} = \frac{f(v_{n_j})}{|v_{n_j}|} > a_{n_j} \frac{v_{n_j}}{|v_{n_j}|} = -a_{n_j}.$$

Again, this yields  $f^\circ(0; -1) \geq 0$ , and hence,  $f^-(0) \leq 0$ , contradicting the hypothesis that  $f^-(0) > 0$ .  $\square$

We would like to thank Adam D. Mawby (Bath) for performing the simulations in Section 5.

## REFERENCES

- [1] M.A. Aizerman and F.R. Gantmacher, *Absolute Stability of Regulator Systems*. Holden-Day, San Francisco (1964).
- [2] B.D.O. Anderson and S. Vongpanitlerd, *Network Analysis and Synthesis: A Modern Systems Theory Approach*. Prentice Hall, Englewood-Cliffs, NJ (1973).
- [3] V. Barbu, *Analysis and Control of Nonlinear Infinite-Dimensional Systems*. Academic Press, Boston (1993).
- [4] F. Bucci, Frequency-domain stability of nonlinear feedback systems with unbounded input operator. Preprint. Dipartimento de Matematica Applicata "G. Sansone", Università degli Studi di Firenze (1997) (to appear in *Dynamics of Continuous, Discrete and Impulsive Systems*).
- [5] F.H. Clarke, *Optimization and Nonsmooth Analysis*. Wiley, New York (1983).
- [6] F.H. Clarke, Yu.S. Ledyev, R.J. Stern and P.R. Wolenski, *Nonsmooth Analysis and Control Theory*. Springer-Verlag, New York (1998).
- [7] C. Corduneanu, *Integral Equations and Stability of Feedback Systems*. Academic Press, New York (1973).

- [8] C. Corduneanu, *Almost Periodic Functions*. Wiley, New York (1968).
- [9] R.F. Curtain, H. Logemann, S. Townley and H. Zwart, Well-posedness, stabilizability and admissibility for Pritchard-Salamon systems. *Math. Systems, Estimation and Control* **7** (1997) 439–476.
- [10] R.F. Curtain and G. Weiss, Well-posedness of triples of operators in the sense of linear systems theory, in *Control and Estimation of Distributed Parameter System*, edited by F. Kappel, K. Kunisch and W. Schappacher. Birkhäuser Verlag, Basel (1989) 41–59.
- [11] G. Gripenberg, S.-O. Londen and O. Staffans, *Volterra Integral and Functional Equations*. Cambridge University Press, Cambridge (1990).
- [12] P.R. Halmos, *Finite-Dimensional Vector Spaces*. Springer-Verlag, New York (1987).
- [13] H.K. Khalil, *Nonlinear Systems*, 2nd Edition. Prentice-Hall, Upper Saddle River, NJ (1996).
- [14] S. Lefschetz, *Stability of Nonlinear Control Systems*. Academic Press, New York (1965).
- [15] G.A. Leonov, D.V. Ponomarenko and V.B. Smirnova, *Frequency-Domain Methods for Nonlinear Analysis*. World Scientific, Singapore (1996).
- [16] B.A.M. van Keulen,  *$H^\infty$ -Control for Infinite-Dimensional Systems: A State-Space Approach*. Birkhäuser Verlag, Boston (1993).
- [17] H. Logemann, Circle criteria, small-gain conditions and internal stability for infinite-dimensional systems. *Automatica* **27** (1991) 677–690.
- [18] H. Logemann and E.P. Ryan, Time-varying and adaptive integral control of infinite-dimensional regular linear systems with input nonlinearities. *SIAM J. Control Optim.* **38** (2000) 1120–1144.
- [19] H. Logemann, E.P. Ryan and S. Townley, Integral control of linear systems with actuator nonlinearities: lower bounds for the maximal regulating gain. *IEEE Trans. Auto. Control* **44** (1999) 1315–1319.
- [20] H. Logemann, E.P. Ryan and S. Townley, Integral control of infinite-dimensional linear systems subject to input saturation. *SIAM J. Control Optim.* **36** (1998) 1940–1961.
- [21] H. Logemann and S. Townley, Low-gain control of uncertain regular linear systems. *SIAM J. Control Optim.* **35** (1997) 78–116.
- [22] A. Pazy, *Semigroups of Linear Operators and Applications to Partial Differential Equations*. Springer-Verlag, New York (1983).
- [23] W. Rudin, *Functional Analysis*. McGraw-Hill, New York (1973).
- [24] D. Salamon, Realization theory in Hilbert space. *Math. Systems Theory* **21** (1989) 147–164.
- [25] D. Salamon, Infinite-dimensional linear systems with unbounded control and observation: A functional analytic approach. *Trans. Amer. Math. Soc.* **300** (1987) 383–431.
- [26] O.J. Staffans, *Well-Posed Linear Systems*, monograph in preparation (preprint available at <http://www.abo.fi/~staffans/>).
- [27] O.J. Staffans, Quadratic optimal control of stable well-posed linear systems. *Trans. Amer. Math. Soc.* **349** (1997) 3679–3715.
- [28] M. Vidyasagar, *Nonlinear Systems Analysis*, 2nd Edition. Prentice Hall, Englewood Cliffs, NJ (1993).
- [29] G. Weiss, Transfer functions of regular linear systems, Part I: Characterization of regularity. *Trans. Amer. Math. Soc.* **342** (1994) 827–854.
- [30] G. Weiss, Admissibility of unbounded control operators. *SIAM J. Control Optim.* **27** (1989) 527–545.
- [31] G. Weiss, Admissible observation operators for linear semigroups. *Israel J. Math.* **65** (1989) 17–43.
- [32] G. Weiss, The representation of regular linear systems on Hilbert spaces, in *Control and Estimation of Distributed Parameter System*, edited by F. Kappel, K. Kunisch and W. Schappacher. Birkhäuser Verlag, Basel (1989) 401–416.
- [33] D. Wexler, On frequency domain stability for evolution equations in Hilbert spaces via the algebraic Riccati equation. *SIAM J. Math. Analysis* **11** (1980) 969–983.
- [34] D. Wexler, Frequency domain stability for a class of equations arising in reactor dynamics. *SIAM J. Math. Analysis* **10** (1979) 118–138.